INSTRUMENT SHOP

ID No. A14459
– RETURN TO –
INSTRUMENT CONTROL
SYLVANIA SES -- West

OPERATION AND SERVICE MANUAL FOR MODEL H1826 RF OSCILLATOR UNIT

WEINSCHEL ENGINEERING

GAITHERSBURG, MARYLAND

MP MASTER
MA35906

INSTRUMENT SHOP

SN 2641
60377

ID No. A14459
- RETURN TO -
INSTRUMENT CONTROL
SYLVANIA SES -- West

OPERATION AND SERVICE
MANUAL FOR
MODEL H1826
RF OSCILLATOR
UNIT

For information on Sweep Oscillator Mainframe,
see Operation and Service Manual IM90 (MP).

WEINSCHEL ENGINEERING
Gaithersburg, Maryland
Box 577 20760
JIM HAMMER
3- 301-948-3434

9-10 LUNCH PST

Digitized by the Internet Archive
in 2025

https://archive.org/details/manualsplus_07192

MANUAL CHANGE INFORMATION

OSCILLATOR MANUAL

Change	Unit	Page	Nature of Change
387	ALL		R874 changes from 220 ohm (301-221) to 215 ohm (305-063) R900 changes from 100 ohm (301-101) to 147 ohm (305-046) Z829, Z845 and Z846 change from IN753A (6V)(501-007) to IN759A (12V)(501-008)
403	All Grid Leveled Units		Add Z850 (500-005) SCE2
412	All VTM Units		Add R994, R995 and R996 470K ohm/2W (303-473)

CAUTION

The power level at the RF output terminal may exceed the power rating of standard detectors. This power level can cause burnout of crystal diodes and power meter elements. The operator should, therefore, insert an appropriate amount of attenuation when this instrument is used with crystal detectors, thermistor mounts, bolometers, etc. . .

TABLE OF CONTENTS

MICROWAVE SWEEP OSCILLATOR

OSCILLATOR UNIT

		Page
I.	General Description A. Plug-in Oscillator Unit replacement	3
II.	Specifications	4
III.	Principles of Operation (Refer to Section III Page S5 in the Basic Unit Instruction Manual)	
IV.	Controls	6
V.	Inputs	7
VI.	Protective Circuits (Refer to Section VI Page S19 in the Basic Unit Instruction Manual)	
VII.	Calibration	8
VIII.	Tube Replacement	19
IX.	Parts list	20
X.	Warranty	27
XI.	Component location	31
XII.	Schematic	32

LIST OF TABLES

Table		Page
1	Model 221 Plug-Ins and Accessories	5A

I. GENERAL DESCRIPTION

This plug-in Oscillator Unit is to be used in conjunction with a Model 221 Basic Unit manufactured by Micro-Power, Inc. When this Oscillator is inserted into the Model 221 Basic Unit the equipment will meet the specifications listed in Section II of this manual. See Table 1 Page 5A for list of Plug-in Oscillators.

A. CHANGING THE FREQUENCY RANGE OF THE MICROWAVE SWEEP OSCILLATOR

The following steps must be taken to change the frequency band of operation of the Model 221 Microwave sweep oscillator. (Example: There is currently installed in the Basic Unit a 1-2 GHz Oscillator, and it is desirable to change to a 2-4 GHz Oscillator.)

1. Turn the POWER switch to the OFF position.

2. Remove the four (4) knurled nuts holding the 1-2 GHz scale to the Basic Unit front panel and remove the 1-2 GHz dial scale.

3. Remove the two (2) screws holding the 2-4 GHz dial scale to the side of the 2-4 GHz plug-in Oscillator Unit and remove the 2-4 GHz dial scale.

4. Place the 2-4 GHz dial scale on the Basic Unit front panel and fasten it with the four (4) knurled nuts.

5. Turn the thumb screw located on the front panel of the 1-2 GHz Oscillator unit 2-3 full turns counter clockwise, and by pulling forward on the thumb screw remove the Oscillator Unit from the 221 Basic Unit.

6. Turn the front panel thumb screw on the 2-4 GHz Oscillator Unit one (1) turn counterclockwise and insert the 2-4 GHz plug-in Oscillator Unit into the 221 Basic Unit and turn the thumb screw clockwise until tight.

7. Place the 1-2 GHz dial scale on the scale mounting studs of the 1-2 GHz Oscillator Unit and fasten it with two 6-32 3/8" long screws. CAUTION must be taken in the storage of spare Oscillator Units in that a four inch (4") distance away from ferrous materials must be maintained. A suggested storage receptacle is the Micro-Power Model 200 Storage Unit.

8. Turn POWER switch to RF ON position after a one (1) minute time delay; the equipment will be ready for operation in the 2-4 GHz frequency range.

II. SPECIFICATIONS

RF FREQUENCY RANGE: the frequency range is determined by the plug-in oscillator used. Refer to Table 1, page 5A.

RF OUTPUT POWER: the power output is determined by the plug-in oscillator used. Refer to Table 1, page 5A.

SWEEP PRESENTATION:

- END LIMIT: between any 2 frequencies in band.
- MARKER END LIMIT: between any 2 frequencies in band.
- SYMMETRICAL: calibrated and adjustable from 0-100% of the frequency band covered.
- EXTERNAL: direct coupled 20 volts for full sweep, positive voltage increases RF frequency. Response time: 200 microseconds for full sweep with increasing frequency and 2 milliseconds for full sweep with decreasing frequency. Provision for external resistance programming.
- CW OPERATION: 4 independent single frequencies calibrated and continuously variable.

MARKER: 2 independent adjustable markers displayed either as dips in RF output or externally as video markers.

- ACCURACY: BWO units $\pm$ 1%, VTM units $\pm$ 1.5%
- RESOLUTION: less than 0.05% of sweep range
- AMPLITUDE: continuously variable
- OUTPUT: auxiliary video marker, amplitude 5 volts.

SWEEP RATE: decade from 0.01 sweep/sec to 100 sweep/sec, vernier 10 to 1 continuously adjustable.

TRIGGERED SWEEP:

- INTERNAL: recurrent.
- LINE: line frequency.
- EXTERNAL: 10 volts negative input will initiate sweep.
- MANUAL: front panel pushbutton.

SWEEP OUTPUT: direct coupled, adjustable from 0-15 volts peak.

PROPORTIONAL OUTPUT: direct coupled voltage proportional to instantaneous frequency; 0 volts at low end and 10 volts at high end.

BLANKING OUTPUT: 10 volts negative

PEN LIFT OUTPUT: relay contact closure during forward trace portion of sweep.

BASE LINE: switch selects RF ON or OFF during retrace.

FREQUENCY STABILITY:

- RESIDUAL FM: BWO units; 2 ppm peak (See section IV, par. 3, Page 515 of the 221 Basic Unit Instruction Manual covering controls and sweep speed selector.)
  VTM units; 10 ppm typical.
- LINE REGULATION: $\pm$ 5 ppm maximum for $\pm$ 10% change in line voltage.

LEVELED RF OUTPUT: Internal feedback amplifier maintains output power variation to within 0.1 dB plus coupler and detector variation. When operated with internal directional detector, total power variation is as indicated on page 1 of this manual. Optional use with external directional coupler and RF crystal detector or RF power meter.

MODULATION:

INTERNAL AM: square wave modulation adjustable from 950 to 1050 Hz.

EXTERNAL AM: 20 volts positive signal increases RF output to maximum, rise and fall times for BWO units are 0.1 microseconds unleveled and approximately 10 microseconds leveled; for VTM units rise and fall times are 1.0 microseconds unleveled and approximately 10 microseconds leveled.

EXTERNAL FM: BWO units; direct coupled input provides frequency response in excess of 5 MHz.

RESIDUAL AM: 40 dB below rated RF output.

SPURIOUS SIGNALS: Non-Harmonics 40 dB below rated RF output, harmonics 20 dB below rated RF output.

GENERAL:

DIMENSIONS: 8 3/4" high x 17 1/4" wide x 17 1/2" deep, rack mounting adaptors included.

AMBIENT OPERATING TEMPERATURE: -10° to +50°C.

POWER SWITCH: OFF, RF OFF, RF ON.

POWER INPUT: 105 to 125 VAC 50-65Hz, approximately 150 VA. 210 to 250 VAC optional,. 400 Hz operation on special order.

WEIGHT: 12 to 25 lbs. depending upon unit

TABLE I

MICROWAVE SWEEP OSCILLATOR

MODEL 221

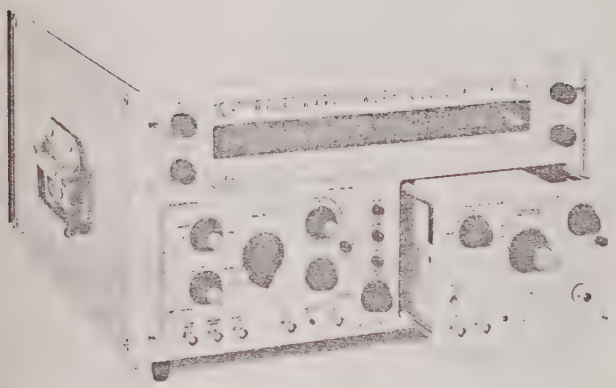

Oscillator Mainframe With Plug-in

Accessories:

Model 200 Storage Enclosure
" 201 Remote Freq. Control
" 202 Multi-Band Sweep Control
" 203A Calibration Unit

Model 221 System 1 - 1-12.4 GHz Sweep System

PLUG-IN OSCILLATORS

	GRID LEVELED				DIODE LEVELED			
		Internal directional detector				Internal directional detector		
		Without	With			Without	With	
Frequency Range (Gc)	Min. Power* Output (mW)	Model	Model	Leveled Power Variation (dB)	Min. Power* Output (mW)	Model	Model	Leveled Power Variation (dB)
0.2-0.4	-	-	-	-	20	H24MD	-	-
0.25-0.5	-	-	-	-	50	H25MD	-	-
0.35-0.7	-	-	-	-	100	H37MD	-	-
0.4-1.2	-	-	-	-	20	H41MD	-	-
0.5-1.0	-	-	-	-	100	H51MD	-	-
0.5-1.0	30	H51B	-	-	15	H51DB	-	-
1-2**	-	-	-	-	40	H102SD	H102SDL	±0.3
1-2	100	H102	H102L	±0.3	60	H102D	H102DL	±0.3
1.4-2.5	100	H142	H142L	±0.3	60	H142D	H142DL	±0.3
1.7-4.2	-	-	-	-	15	H204DA	H204DLA	±0.5
2-4**	-	-	-	-	20	H204SD	H204SDL	±0.5
2-4	80	H204	H204L	±0.5	40	H204D	H204DL	±0.5
3.5-6.75	40	H356	H356L	±0.5	25	H356D	H356DL	±0.5
3.7-8.3	-	-	-	-	8	H408DA	H408DLA	±0.5
4-8	30	H408	H408L	±0.5	20	H408D	H408DL	±0.5
7-11	25	H711	H711L	±0.5	10	H711D	H711DL	±0.5
7-12.4	25	H712	H712L	±1.0	10	H712D	H712DL	±1.0
8-12.4	50	H812	H812L	±0.75	25	H812D	H812DL	±0.75
10-15.5	20	H1015	-	-	-	-	-	-
12.4-18	40	H1218	-	-	-	-	-	-
18-26.5	20	H1826	-	-	-	-	-	-
26.5-40	5	H2640	-	-	-	-	-	-

** All-Solid State

*Value indicated for units without internal directional detector, 1 dB less with internal directional detector

IV. CONTROLS

1. SYMMETRICAL SWEEP WIDTH
In each switch position, the sweep width is indicated by the panel calibration. When this switch is in the extreme clockwise position the potentiometer concentric with it is energized and can be used to vary the sweep width continuously from 0 to 100%.

2. RF LEVELER
In the XTAL INT position, the amplitude of the RF output is maintained constant independent of the RF frequency by means of the internal feedback leveling system. This description does not apply to Oscillator Units which have no internal leveling components. In these units the RF LEVELER switch is prevented from rotating to the XTAL INT position.
In the XTAL EXT position the feedback leveling amplifier operates with an external directional coupler and detector. The detected output is connected to the EXT DETECTOR INPUT on the front panel of the Oscillator Unit and should be of negative polarity.
In the OFF position the RF output is unleveled.
In the PWR MTR position leveling is achieved in the same manner as in the XTAL EXT position except that a power meter is used instead of the crystal detector. The recorder output of the power meter is connected to the EXT DETECTOR INPUT on the front panel of the Oscillator Unit. When using a power meter, the operator should restrict the sweep speed to the slower ranges because of the slower response time of the power meter element.

3. RF LEVEL
This control varies the RF output amplitude. With the RF LEVELER switch in the OFF position, the RF amplitude can be varied from 0 to maximum but it will be unleveled across the band. With the RF LEVELER IN XTAL INT, XTAL EXT, (with an external directional coupler) or PWR MTR (with a power meter) positions, the RF LEVEL control sets the maximum level of the RF amplitude across the band. In those portions of the band where there is sufficient RF power to reach this level the output will be leveled. In those portions of the band where there is insufficient RF power, the output will be unleveled, and the unleveled indicator will be lighted. The operator can therefore set the RF LEVEL control so that a leveled output is obtained across the entire frequency range of the unit, or he can set this control to obtain a higher leveled output over a portion of the range where higher RF power is available.

V. INPUTS

1. EXTERNAL DETECTOR INPUT

Provision is made for the use of an external directional coupler-detector having an output of negative polarity together with the internal feedback leveling amplifier in the Oscillator Unit. In its use, however, attention must be paid to meeting the stability requirements of the feedback loop. This is done by connecting the output of the detector to the EXT DETECTOR INPUT and adjusting the GAIN control. This GAIN control is located on the oscillator unit panel and is a screw driver adjustment. With the unit on, the RF LEVELER in the EXT position and the RF LEVEL control in its maximum clockwise position, the gain control should be adjusted so that the RF amplitude is leveled just at its maximum value.

2. FM INPUT *

This input can be used to direct couple wide band signals to the helix of the BWO to obtain rapid frequency modulation of the RF output. The capacity at this input is a few hundred picofarads. Using a video generator with a 50 ohm source impedance the band-width is approximately 5 MHz. The maximum signal levels that should be applied at this input is ± 20 volts. The modulation sensitivity (MHz/volt) will be different for each frequency range and will depend on the particular portion of the band; this sensitivity is approximately 0.1% per volt.

3. AM PULSE INPUT

This input can be used to couple pulses into the unit to obtain RF pulses at the output with rapid rise and fall times. The input signal is AC coupled to the grid of the BWO tube. In operation, the RF LEVELER switch should be in the OFF position; and the RF LEVEL control should be adjusted so that no power is obtained at the output with no pulse input. The input pulse amplitude should then be increased (approximately ±20 volts peak) until maximum power is obtained at the peak of the pulse.

* Not applicable to plug-in Oscillator Units using a Voltage Tunable Magnetron (VTM)

VII. CALIBRATION OSCILLATOR UNIT

A calibrated Basic Unit is required for the calibration of the Oscillator Unit.

With the plug-in oscillator unit inserted into the Basic Unit, turn the POWER control switch to RF OFF and allow a 15-minute warm-up period before proceeding with the calibration.

Test instruments required for calibration:

- direct coupled oscilloscope
- DC Voltmeter with at least 1/4% accuracy and capable of floating at 3 Kilovolts with respect to ground
- Frequency meter
- Microwave power meter
- DC milliammeter capable of floating at 3 Kilovolts with respect to ground.

For calibration the controls are set as follows:

**POWER	RF OFF
AMPLITUDE	OFF
1000Hz	MAX CW
SWEEPS/SEC	10
VARIABLE	MAX CW
**SWEEP MODE	f1
**MARKER AMPLITUDE	MAX CCW
TRIGGER	INT
M1	FL
M2	LL
**f1	FL
f2	MAX CW
SYMMETRICAL SWEEP WIDTH	MAX CW
SYMMETRICAL SWEEP VERNIER	MAX CW
**RF LEVELER	OFF
**RF LEVEL	MAX CW
*HORIZONTAL SWEEP AMPLITUDE	MAX CW
*RF DURING RETRACE	OFF
*INTERNAL MARKER	ON

FL: First Scale Calibration Line (low frequency)

LL: Last Scale Calibration Line (high frequency)

* These controls are located on rear panel of basic unit.

** Specific changes in these settings will be called for whenever required. For convenience these control settings are also tabulated in Fig. 1, page 14.

HV CLAMP ADJUST	SET MAX CW
LV CLAMP ADJUST	SET MAX CCW

NOTE: The HV CLAMP ADJUST and LV CLAMP ADJUST are located inside the Plug-in Oscillator Unit. See Fig. 3, page 16 (BWO), Fig. 4, page 17 (VTM) for their location. They are accessible when the bottom covers of the Basic Unit and the Oscillator Unit are removed.

ADJUSTMENT STEPS

NOTE: Prior to servicing, the top and bottom covers of both the BASIC UNIT and the OSCILLATOR UNIT must be removed. Calibration is best accomplished while the BASIC UNIT rests on its left side.

1. DC FILAMENT ADJUST
Turn POWER switch to OFF position.

CAUTION: THE VOLTMETER AND THE ADJUSTMENT ARE AT KILOVOLT POTENTIAL WHEN THE POWER SWITCH IS IN THE RF ON POSITION.

Connect the voltmeter between terminals A and E on the printed circuit board (see fig. 3, page 15) with the positive terminal of the voltmeter connected to terminal A. With the POWER switch in the RF OFF position, adjust R216 DC FILAMENT ADJUST (see fig. 22, p. S32 b, Model 221 Basic Unit Manual) for a voltmeter reading of 6.3 volts for the BWO units and 5.6 volts for the VTM units.
Turn POWER switch to OFF position and disconnect the voltmeter.
For BWO units, proceed to step 2.
For VTM units, The OSCILLATOR UNIT is removed and connected to the BASIC UNIT by means of an extender cable. Also, using clip leads, ground the BASIC UNIT chassis to the OSCILLATOR UNIT chassis. Connect the voltmeter across R998 (1.0 ohm for VTM requiring up to 2.5A of filament current or 0.5 ohm for VTM requiring over 2.5A of filament current) at points P and Q (see fig. 5, page 18,) the positive lead of the voltmeter connected to point Q. Adjust R999 FILAMENT CURRENT ADJUST for a voltmeter reading V_r equal to

$V_r = 1.0 \times I_f$ for units requiring up to 2.5A, or
$V_r = 0.5 \times I_f$ for units requiring over 2.5A

where I_f is the value of the filament current specified for this particular tube and which appears on page 1 of this manual.
Proceed to step 3b.

2. HELIX CURRENT MAX ADJUST (BWO units only).
Connect a 20K ohm/volt Voltmeter across capacitor C819 (see p. 33 Component Location for the location of this capacitor). Disconnect the BWO helix lead from terminal F and insert an ammeter between the helix lead and terminal F.
The voltage V_h and the helix current I_h have the following relation:

$$\frac{V_h = (6.2)\ (I_h)}{I_{max}}$$

Where I_h = measured helix current

V_h = measured voltage across C819

I_{max} = max helix current specified by manufacturer and indicated on page 1 of the OSCILLATOR Manual for the BWO type used.

With the POWER switch in the RF ON position, adjust R974 HELIX CURRENT MAX ADJ until the above relation is satisfied.
Example: If I_h = 1.5mA
I_{max} = 3.0mA

Adjust R974 for V_h = 3.1V
Proceed to step 3a.

3a. Preliminary ANODE VOLTAGE ADJUST - CATHODE CURRENT ADJUST (BWO units only)
Turn the unit off by rotating the Power switch to OFF position. Disconnect the CATHODE (yellow) lead of the BWO from terminal C. Connect a milliammeter between the CATHODE (yellow) lead of the BWO and terminal C, with the negative terminal of the meter connected to terminal C. Set the ammeter range to approximately 15 mA full scale. Turn R819 ANODE VOLTAGE ADJUST completely counterclockwise.

CAUTION: FOR THIS ADJUSTMENT SPECIAL CARE MUST BE EXCERCISED AS BOTH VOLTMETER AND ADJUSTMENT ARE AT KILOVOLT POTENTIALS.

Turn POWER switch to RF ON position. After the one minute time delay, and using AN INSULATED SCREWDRIVE adjust R819 ANODE VOLTAGE ADJUST so that the cathode current is the value indicated on page 1 for specific BWO installed.
Turn the unit off by rotating the POWER switch to OFF position and disconnect the ammeter. Reconnect the CATHODE (yellow) lead of the BWO terminal C and proceed to step 4.

3b. INJECTION ELECTRODE ADJUST- (VTM UNITS ONLY)
Turn the unit off by rotating the POWER switch to the OFF position. Connect the voltmeter between the cathode of the VTM (terminal 3) and the injection electrode of the VTM (terminal 1), with the negative lead of the voltmeter connected to the cathode (see fig. 5, page 18)

CAUTION: FOR THIS ADJUSTMENT SPECIAL CARE MUST BE EXERCISED AS BOTH VOLTMETER AND ADJUSTMENT ARE AT KILOVOLT POTENTIAL.

Turn POWER switch to the RF ON position. After the one minute time delay and using AN INSULATED SCREWDRIVER adjust R819 INJECTION ELECTRODE ADJUST (see fig. 4, page 17) to the voltage value specified by the tube manufacturer and which appears on page 1 of this manual. Turn the unit off by rotating the POWER switch to the OFF position. Disconnect the voltmeter and extender cable and reinsert the OSCILLATOR UNIT into the BASIC UNIT.

4. LEVEL BALANCE

Note: This adjustment is to be made with an external directional coupler and detector.

Connect SWEEP OUTPUT to the horizontal amplifier input of osscilloscope and connect the detected RF OUTPUT to the vertical amplifier. Set RF LEVEL to max CCW. Set SWEEP MODE in f1-f2 position. Set f1 to max CCW position. Set RF LEVELER switch to XTAL EXT. Turn POWER switch to RF ON position. Adjust R936 LEVEL BALANCE until no RF output is visible.

CAUTION: WITH THE POWER SWITCH IN THE "RF ON" POSITION, KILOVOLT POTENTIALS ARE APPLIED TO THE MICROWAVE TUBE. ALTHOUGH THE FOLLOWING ADJUSTMENTS THEMSELVES ARE NOT AT HIGH POTENTIAL, CARE MUST BE EXERCISED TO AVOID ACCIDENTAL CONTACT WITH POINTS OF HIGH POTENTIAL INSIDE THE UNIT.

5a. LEVEL SET

Note: This adjustment is to be deleted for Oscillator Units which do not have internal leveling components.

Turn AMPLITUDE MOD to OFF, and turn RF LEVEL to MAX CW position, RF LEVELER to XTAL INT position. Adjust R937 LEVEL SET, so that the RF amplitude is leveled just at its maximum value.

5b. RF LEVEL MIN.

Note: This adjustment applies only to grid leveled units with internal leveling components.

Adjust the RF LEVEL control so that the display is just leveled across the full band. Insert a 6dB pad between the RF output and the indicating device and note the RF output level displayed. Remove the 6dB pad and turn the RF LEVEL knob to MAX CCW position. Adjust R966 RF LEVEL MIN so that the RF output level displayed is equal to the level observed with the 6dB pad inserted. Proceed to step 6.

6. Preliminary LOW FREQUENCY ADJUST

NOTE: For units that do not have internal leveling components, turn RF LEVELER switch to OFF position. For units having internal leveling components leave the RF LEVELER switch set at XTAL INT position.

Set RF LEVEL CONTROL so that the output is just leveled across the full sweep range for leveled units, or at MAX CW position for unleveled units. Set MARKER AMPLITUDE to approximately mid range. Connect Frequency Meter as in fig. 2B, page 15. Set M1 to first calibrated line appearing on the left hand side of the scale. Set the Frequency Meter to the frequency indicated by marker M1. Adjust R848 LOW FREQUENCY ADJUST so that the two indications coincide.

7. Preliminary HIGH FREQUENCY 1 ADJUST
Set M2 to last calibrated line appearing on the right hand side of the scale. Set the Frequency Meter to the frequency indicated by marker M2. Adjust R849 HIGH FREQUENCY 1 ADJUST so that the two indications coincide. For BWO units proceed to step 8; <u>for VTM units</u> proceed to step 9.

8. Final ANODE VOLTAGE ADJUST - CATHODE CURRENT ADJUST
(BWO units only) Repeat step 3a. Set controls as indicated in calibration chart page 14.

9. Final LOW FREQUENCY ADJUST
Repeat step 6. Set control as indicated on calibration chart page 14.

10. Final HIGH FREQUENCY 1 ADJUST

Repeat Step 7.

11. HIGH FREQUENCY 2 ADJUST
Set SWEEP MODE switch to SYM M1 (or SYM f1)*. Set f2 (or M2) at the last calibrated line (right hand side). Set frequency meter to the frequency indicated by that last calibration line. Turn M1 (or F1) to the same last callbration line. Adjust R850 HIGH FREQUENCY 2 ADJUST so that the two indications coincide.

12. HV CLAMP ADJUST
Set SWEEP MODE switch to f1-f2. Set M1 at the first calibrated line at the low frequency end of the scale and set M2 at the last callbrated line at the high frequency end of the scale. Set f1 MAX CCW and set f2 MAX CW. Adjust R916 HV CLAMP ADJUST so that the range of Frequency Sweep just reaches the high frequency marker M2.

13. LV CLAMP ADJUST
With all the controls set as in step 12, adjust R844 LV CLAMP ADJUST so that the range of frequency sweep just reaches the low frequency marker M1.

* Used on Basic Units that have this designation.

CALIBRATION STEPS		CONTROL SETTINGS														
		1	2	3a	3b	4	5a	5b	6	7	8	9	10	11	12	13
MARKER AMPLITUDE	MID-RANGE								X	X		X	X	X	X	X
	MAX CCW	X	X	X	X	X	X	X			X					
f1	MAX CW	FL	FL	FL	FL						FL					
	MAX CCW					X	X	X	X	X		X	X	X	X	X
RF LEVELER	XTAL INT						X	X	X	X		X	X	X	X	X
	XTAL EXT					X										
	OFF	X	X	X	X				0	0	X	0	0	0	0	0
RF LEVEL	MAX CW	X	X	X	X		X	&a	&a	&a	X	&a	&a	&a	&a	&a
	MAX CCW					X										
SWEEP MODE	f1-f2					X	X	X	X	X		X	X		X	X
	f1	X	X	X	X						X					
	SYM MI (SYM f1)													X		
POWER	RF OFF	X														
	RF ON		X	X	X	X	X	X	X	X	X	X	X	X	X	X

LEGEND: FL FIRST SCALE CALIBRATION LINE (LOW FREQUENY)

&a AS SPECIFIED IN TEXT

0 FOR UNITS WITHOUT INTERNAL LEVELING COMPONENTS.

CALIBRATION — OSCILLATOR UNIT

FIG. 1 CHANGES IN CONTROL SETTINGS

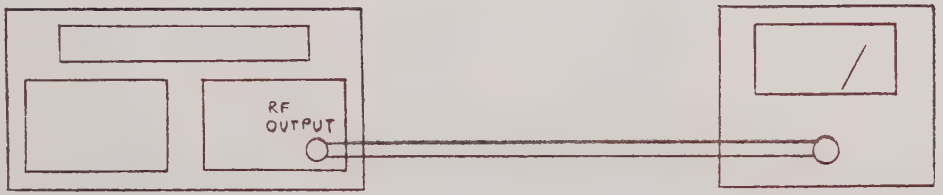

FIG 2a. POWER MEASUREMENT

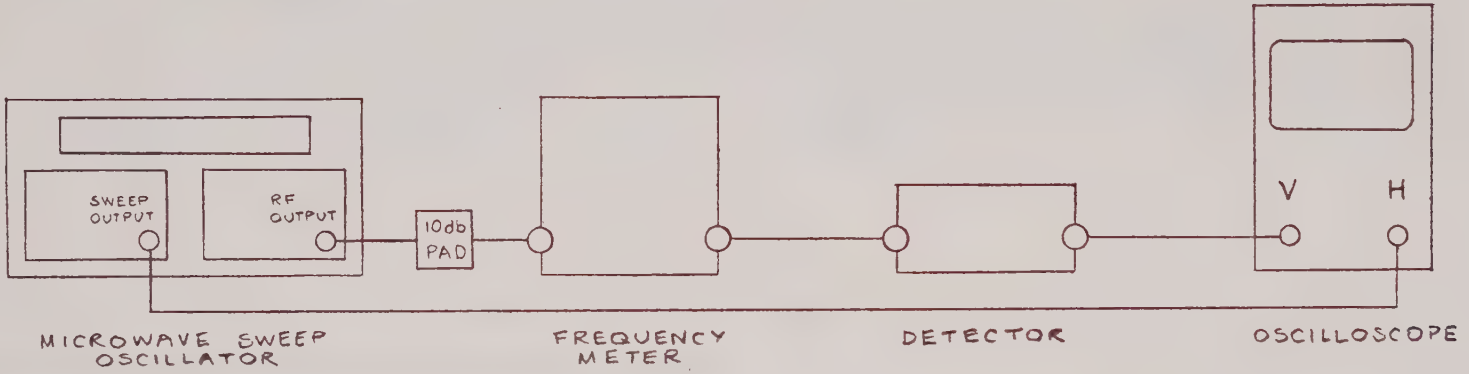

FIG 2b. FREQUENCY MEASUREMENTS.

CALIBRATION - OSCILLATOR UNIT

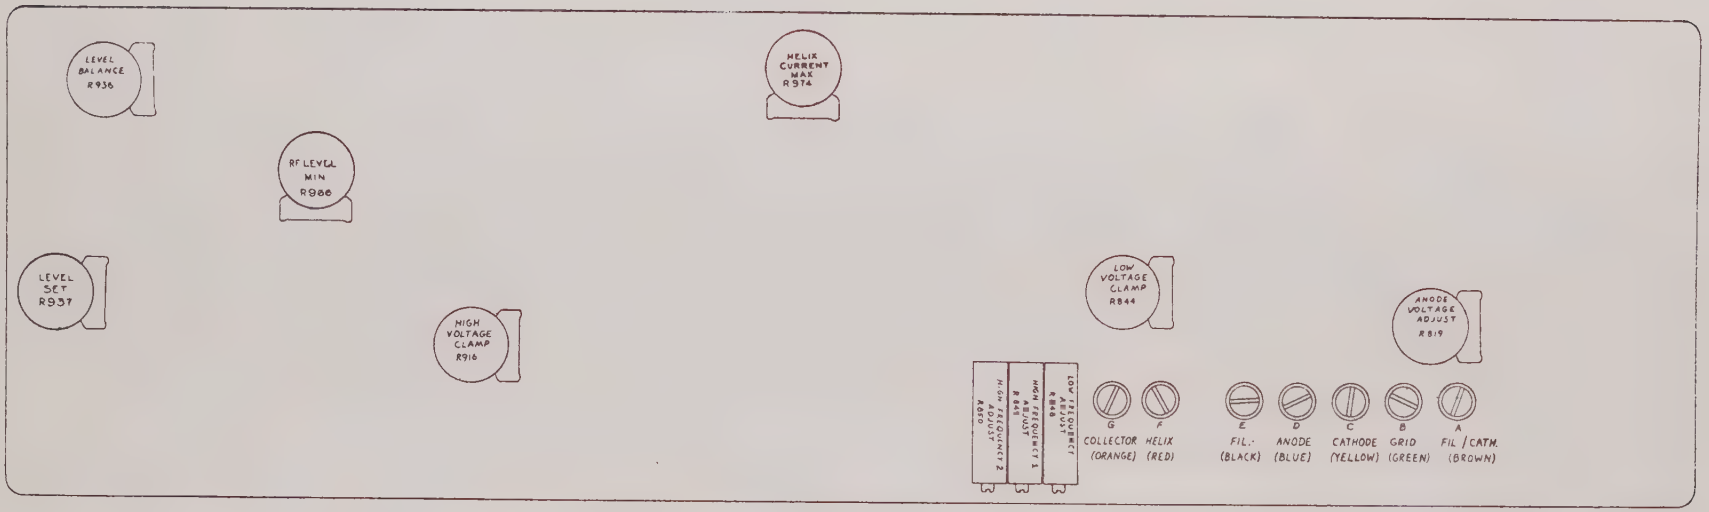

FIG 3. CALIBRATION — ADJUSTMENTS AND TUBE CONNECTIONS — BWO UNITS

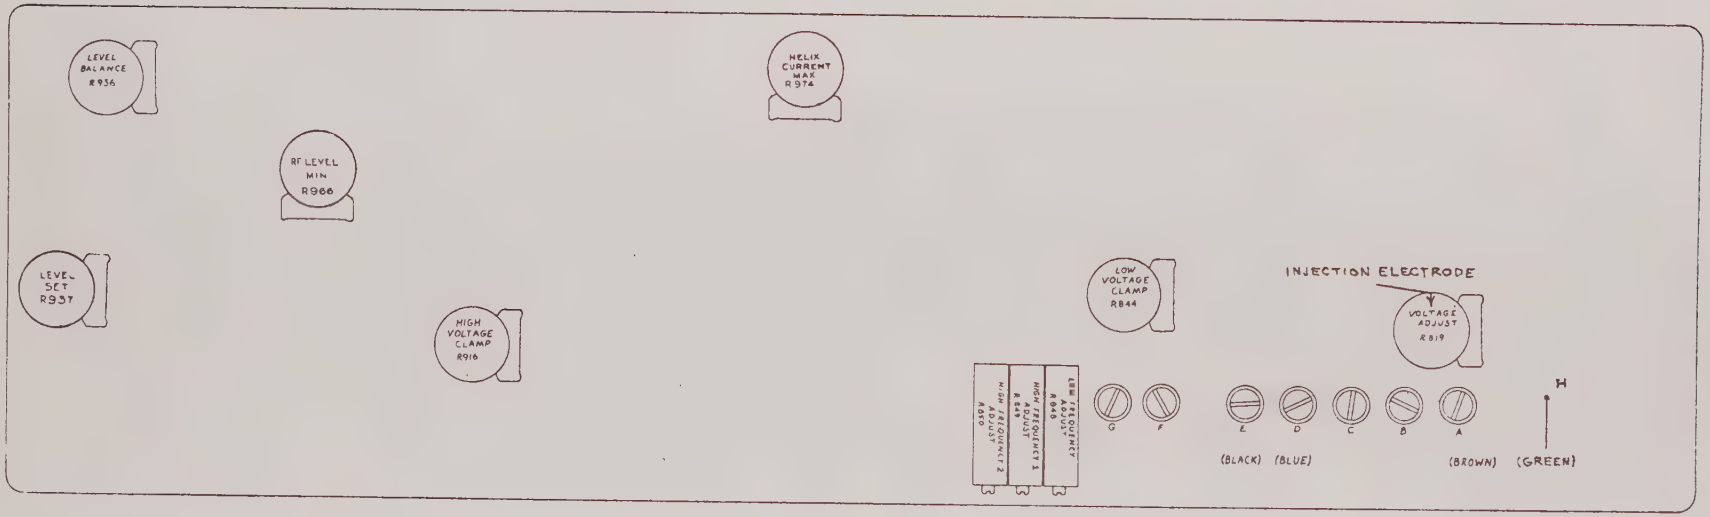

FIG 4. CALIBRATION — ADJUSTMENTS AND TUBE CONNECTIONS — VTM UNITS

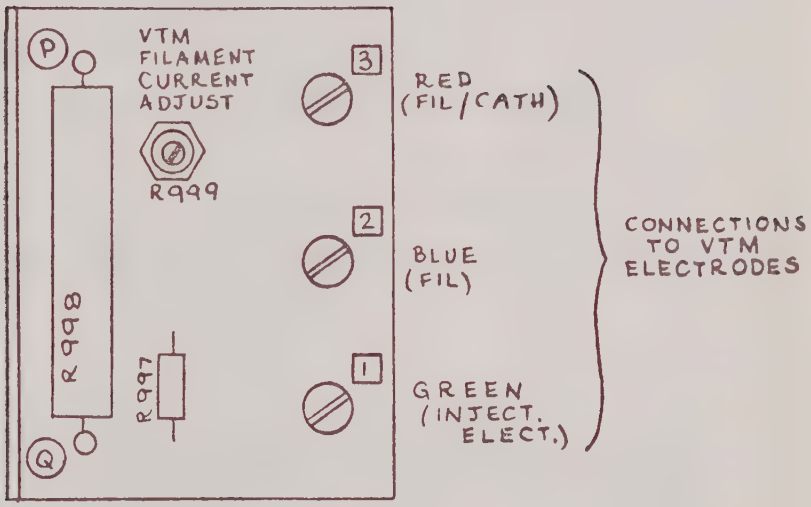

FIG 5. CALIBRATION – COMPONENT LOCATION FOR VTM UNITS

VIII. TUBE REPLACEMENT

CAUTION: Before proceeding with the tube replacement prepare a work space free of material that can be magnetized so as to avoid mishaps due to the high magnetic field associates with the microwave tube.

1. Remove the Oscillator Unit from the Basic Unit.

2. Disconnect the tube RF Output connection.

3. Disconnect the microwave tube power leads from the terminal board.

4. Remove the tube by removing its four mounting fasteners.

5. Place the new tube on the mounting plate and tighten in place with the four mounting fasteners.

6. Connect the tube RF connection.

7. If the entire equipment is to be calibrated at this time DO NOT CONNECT THE MICROWAVE TUBE POWER LEADS but first calibrate the Model 221 Basic Unit and connect the microwave tube only when required by the calibration procedure. Connect BWO'S upon completion of step 1. Connect VTM'S upon completion of step 3b. (For electrode connections refer to fig. 3, page 16for BWO and fig. 5, page 18 for VTM).

8. Enter on Page 1 of this manual the serial number and the magnitude of the parameters of the new tube, in place of the ones pertaining to the tube just replaced.

9. All adjustments in the Oscillator Unit should be recalibrated starting at step 1 of the Calibration Procedure section VII of this manual.

OSCILLATOR UNIT - GENERAL PARTS LIST

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
C801-C805	420-022	330pF 1kV 10% Cer	71590	DD331
C806	460-100	10pF 500V 10% Mica	84171	DM-15
C807	420-040	0.0047uF 1kV 10% Cer	56289	5GA-D47
C808	460-151	150pF 500V 10% Mica	84171	DM-15
C809,C810	430-032	0.22uF 50V 20% Myl	84411	601PE
C811***	420-035	0.002uF 1kV 20% Cer	56289	5GA-D20
C812	-	Factory selected		
C813	430-017	0.047uF 50V 20% Myl	84411	601PE
C814	400-043	10uF 25V 20% Elect	56289	TE-1204
C815	420-005	0.0025uF 6kV 20% Cer	71590	DA-111-0015
C816*,C817*	410-043	0.25uF 2.5kV 10% Film	18786	
C818	420-004	0.005uF 3kV 20% Cer	71590	DD30-502
C819	400-044	100uF 12V -10+100% Elect	56289	TE-1135
C820****	-	see parts list for specific unit		
C821	430-027	0.01uF 50V 20% Myl	84411	601PE
C822	430-024	0.02uF 50V 20% Myl	84411	601PE
C823	400-041	100uF 25V -10+100% Elect	56289	TE-1211
C824	430-011	0.1uF 50V 20% Myl	84411	601PE
C825	430-024	0.02uF 50V 20% Myl	84411	601PE
C826	460-221	220pF 500V 10% Mica	84171	DM-15
CD901	-	Detector, Crystal, see page 1.		
CR801	500-010	DIODE	01295	1N914
CR802	-	Not assigned		
CR803	500-008	DIODE	01295	U443
CR804	500-008	DIODE	01295	U443
CR805-CR807	500-008	DIODE	01295	U443
CR808-CR820	500-005	DIODE	14099	SCE2
CR821,CR822	-	Not assigned		
CR823	500-005	DIODE	14099	SCE2
CR824-CR826	-	Not assigned		
CR827	-	see parts list for specific unit		
CR828,CR829	-	Not assigned		
CR830,CR831	500-005	DIODE	14099	SCE2
CR832	-	Not assigned		
CR833	500-010	DIODE	01295	1N914
CR834	500-005	DIODE	14099	SCE2
CR835	-	Not assigned		
CR836	500-010	DIODE	01295	1N914
CR837-CR840	500-005	DIODE	14099	SCE2
CR841,CR842	-	Not assigned		
CR843	500-005	DIODE	14099	SCE2
CR844	-	Not assigned		
CR845-CR848	500-005	DIODE	14099	SCE2
CR849	-	Not assigned		
CR850	500-010	DIODE	01295	1N914
CR851	500-010	DIODE	01295	1N914

OSCILLATOR UNIT - GENERAL PARTS LIST

(CONT'D)

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
CR901	500-010	DIODE	01295	1N914
CR902	500-010	DIODE	01295	1N914
CR903	500-010	DIODE	01295	1N914
CR904	500-010	DIODE	01295	1N914
DC901	-	Coupler, directional, see page 1		
DM901	-	Modulator, diode, see page 1		
FL901	-	see parts list for specific unit		
J901,J902	234-003	Connector BNC	81862	1094/U
J903	234-003	Connector BNC (BWO units)	81862	1094/U
K901*	211-006	Relay, high voltage 4PDT	18786	
P901	234-004	Plug, male (mates with 26-190-32)	13511	26-159-32
PL901	214-006	Pilot light	18786	
Q801	502-005	TRANSISTOR	01295	2N697
Q802,Q803	502-013	TRANSISTOR	01295	2N3703
Q804	502-010	TRANSISTOR	01295	2N3707
Q805	502-015	TRANSISTOR	01295	2N2913
Q806	-	Not assigned		
Q807***	502-005	TRANSISTOR	01295	2N697
Q808***	502-014	TRANSISTOR	07263	2N3645
Q809	502-010	TRANSISTOR	01295	2N3707
Q810	502-005	TRANSISTOR	01295	2N697
Q811	502-013	TRANSISTOR	01295	2N3703
Q812	502-005	TRANSISTOR	01295	2N697
Q813	502-010	TRANSISTOR	01295	2N3707
Q814	502-010	TRANSISTOR	01295	2N3707
Q815-Q817	502-013	TRANSISTOR	01295	2N3703
Q818	502-010	TRANSISTOR	01295	2N3707
Q819	502-010	TRANSISTOR	01295	2N3707
Q820	502-005	TRANSISTOR	01295	2N697
Q821-Q823	502-010	TRANSISTOR	01295	2N3707
Q824	502-014	TRANSISTOR	07263	2N3645
Q825	502-013	TRANSISTOR	01295	2N3703
Q826,Q827	-	Not assigned		
Q828	502-015	TRANSISTOR	01295	2N2913

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
Q829	-	Not assigned		
Q830,Q831***	502-005	TRANSISTOR	01295	2N697
Q832***	502-014	TRANSISTOR	07263	2N3645
R801-R805	305-066	120K Ohm 7W 3% WW	91637	RLS-7
R806-R810	-	Not assigned		
R811-R813	305-059	665K Ohm 1W 1% Comp	91637	DC-1
R814	-	Not assigned		
R815	300-220	22 Ohm 1/4W 10% Comp	01121	RC07GF220K
R816	303-682	6.8K Ohm 2W 10% Comp	01121	RC42GF682K
R817	315-027	BWO units: 3.16K 1/8W 1% Met Film VTM units: omit	91637	RN60C3161F
R818	-	see parts list for specific unit		
R819	304-020	100K Ohm 1/8W LIN VAR WW	71450	U201
R820	302-472	4.7K Ohm 1W 10% Comp	01121	RC32GF472K
R821	300-221	220 Ohm 1/4W 10% Comp	01121	RC07GF221K
R822	-	see parts list for specific unit		
R823	300-102	1K Ohm 1/4W 10% Comp	01121	RC07GF102K
R824-R842	-	see parts list for specific unit		
R843	305-034	400 Ohm 3W 1% WW	91637	RW79U4000F
R844	304-020	100K Ohm 1/8W LIN VAR WW	71450	U201
R845-R847	-	see parts list for specific unit		
R848	304-006	10K Ohm 1/2W LIN Multiturn	91637	2387
R849,R850	-	see parts list for specific unit		
R851	301-102	1K Ohm 1/2W 10% Comp	01121	RC20GF102F
R852	300-681	680 Ohm 1/4W 10% Comp	01121	RC07GF681K
R853	300-102	1K Ohm 1/4W 10% Comp	01121	RC07GF102K
R854	300-333	33K Ohm 1/4W 10% Comp	01121	RC07GF333K
R855	300-102	1K Ohm 1/4W 10% Comp	01121	RC07GF102K
R856	300-101	100 Ohm 1/4W 10% Comp	01121	RC07GF101K
R857	300-473	47K Ohm 1/4W 10% Comp	01121	RC07GF473K
R858	300-333	33K Ohm 1/4W 10% Comp	01121	RC07GF333K
R859,R860	-	see parts list for specific unit		
R861	300-473	47K Ohm 1/4W 10% Comp	01121	RC07GF473K
R862	300-333	33K Ohm 1/4W 10% Comp	01121	RC07GF333K
R863	300-332	3.3K Ohm 1/4W 10% Comp	01121	RC07GF332K
R864	300-101	100 Ohm 1/4W 10% Comp	01121	RC07GF101K
R865	300-223	22K Ohm 1/4W 10% Comp	01121	RC07GF223K
R866	300-473	47K Ohm 1/4W 10% Comp	01121	RC07GF473K
R867	-	see parts list for specific unit		
R868	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R869	300-102	1K Ohm 1/4W 10% Comp	01121	RC07GF102K
R870	300-102	1K Ohm 1/4W 10% Comp	01121	RC07GF102K
R871	-	see parts list for specific unit		
R872	300-102	1K Ohm 1/4W 10% Comp	01121	RC07GF102K
R873	301-222	2.2K Ohm 1/2W 10% Comp	01121	RC20GF222K
R874	301-221	220 Ohm 1/2W 10% Comp	01121	RC20GF221K
R875	300-101	100 Ohm 1/4W 10% Comp	01121	RC07GF101K

(CONT'D)

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
R876	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R877	300-102	1K Ohm 1/4W 10% Comp	01121	RC07GF102K
R878	300-153	15K Ohm 1/4W 10% Comp	01121	RC07GF153K
R879	300-102	1K Ohm 1/4W 10% Comp	01121	RC07GF102K
R880	-	see parts list for specific unit		
R881	300-102	1K Ohm 1/4W 10% Comp	01121	RC07GF102K
R882	300-153	15K Ohm 1/4W 10% Comp	01121	RC07GF153K
R883	300-331	330 Ohm 1/4W 10% Comp	01121	RC07GF331K
R884	300-102	1K Ohm 1/4W 10% Comp	01121	RC07GF102K
R885	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R886	300-472	4.7K Ohm 1/4W 10% Comp	01121	RC07GF472K
R887	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R888,R889	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F
R890	300-472	4.7K Ohm 1/4W 10% Comp	01121	RC07GF472K
R891	300-223	22K Ohm 1/4W 10% Comp	01121	RC07GF223K
R892	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R893,R894	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F
R895	300-223	22K Ohm 1/4W 10% Comp	01121	RC07GF223K
R896	-	see parts list for specific unit		
R897	300-473	47K Ohm 1/4W 10% Comp	01121	RC07GF473K
R898	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R899	303-102	1K Ohm 2W 10% Comp	01121	RC42GF102K
R900,R901	-	see parts list for specific unit		
R902	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R903	300-101	100 Ohm 1/4W 10% Comp	01121	RC07GF101K
R904	300-472	4.7K Ohm 1/4W 10% Comp	01121	RC07GF472K
R905****	300-102	1K Ohm 1/4W 10% Comp	01121	RC07GF102K
R906	300-101	100 Ohm 1/4W 10% Comp	01121	RC07GF101K
R907	300-472	4.7K Ohm 1/4W 10% Comp	01121	RC07GF472K
R908	300-332	3.3K Ohm 1/4W 10% Comp	01121	RC07GF332K
R909	300-223	22K Ohm 1/4W 10% Comp	01121	RC07GF223K
R910,R911	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R912	300-472	4.7K Ohm 1/4W 10% Comp	01121	RC07GF472K
R913	300-683	68K Ohm 1/4W 10% Comp	01121	RC07GF683K
R914	300-223	22K Ohm 1/4W 10% Comp	01121	RC07GF223K
R915	300-683	68K Ohm 1/4W 10% Comp	01121	RC07GF683K
R916	304-023	2K Ohm 1/8W LIN VAR	71450	U201
R917	303-102	1K Ohm .2W 10% Comp	01121	RC42GF023K
R918	300-221	220 Ohm 1/4W 10% Comp	01121	RC07GF102K
R919	300-101	100 Ohm 1/4W 10% Comp	01121	RC07GF221K
R920	300-223	22K Ohm 1/4W 10% Comp	01121	RC07GF223K
R921	303-682	6.8K Ohm 2W 10% Comp	01121	RC42GF682K
R922,R923	-	Not assigned		
R924	300-153	15K Ohm 1/4W 10% Comp	01121	RC07GF153K
R925	300-473	47K Ohm 1/4W 10% Comp	01121	RC07GF473K
R926	300-333	33K Ohm 1/4W 10% Comp	01121	RC07GF333K
R927	315-031	20.5K Ohm 1/8W 1% Met Film	91637	RN60C2052F
R928,R929	315-060	100 Ohm 1/8W 1% Met Film	91637	RN60C1000F
R930	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R931	315-031	20.5K Ohm 1/8W 1% Met Film	91637	RN60C2052F

(CONT'D)

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
R932	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R933,R934	-	Not assigned		
R935	300-223	22K Ohm 1/4W 10% Comp	01121	RC07GF223K
R936	304-018	1K Ohm 1/8W LIN VAR	71450	U201
R937	-	see parts list for specific unit		
R938	315-009	348 Ohm 1/8W 1% Met Film	91637	RN60C3480F
R939	300-102	1K Ohm 1/4W 10% Comp	01121	RC07GF102K
R940	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R941	300-102	1K Ohm 1/4W 10% Comp	01121	RC07GF102K
R942	300-221	220 Ohm 1/4W 10% Comp	01121	RC07GF221K
R943	300-106	10M 1/4W 10% Comp	01121	RC07GF106K
R944-R946	305-006	120K Ohm 10W 1% WW	91637	RS-10
R947,R948*	305-052	10M 2W 1% Comp	91637	DC-2
R949*	303-103	10K Ohm 2W 10% Comp	01121	RC42GF103K
R950*	303-220	22 Ohm 2W 10% Comp	01121	RC42GF220K
R951	304-016	1.5K Ohm 1/2W REV LOG VAR	01121	JAIN0485 S102BA
R952	304-009	10K Ohm 1/2W LOG VAR	01121	JAIN048 S103UA
R953	304-010	10K Ohm 1/2W LIN VAR	18786	
R954-R962	-	see parts list for specific unit		
R963	300-104	100K Ohm 1/4W 10% Comp	01121	RC07GF104K
R964	300-472	4.7K Ohm 1/4W 10% Comp	01121	RC07GF472K
R965	-	Not assigned		
R966	304-023	2K Ohm 1/8W LIN VAR	71450	U201
R967	300-471	470 Ohm 1/4W 10% Comp	01121	RC07GF471K
R968	300-102	1K Ohm 1/4W 10% Comp	01121	RC07GF102K
R969	315-022	24.9K Ohm 1/8W 1% Met Film	91637	RN60C2492F
R970	315-033	46.4K Ohm 1/8W 1% Met Film	91637	RN60C4642F
R971	300-472	4.7K Ohm 1/4W 10% Comp	01121	RC07GF472K
R972	300-104	100K Ohm 1/4W 10% Comp	01121	RC07GF104K
R973	300-223	22K Ohm 1/4W 10% Comp	01121	RC07GF223K
R974	304-023	2K Ohm 1/8W LIN VAR	71450	U201
R975	300-470	47 Ohm 1/4W 10% Comp	01121	RC07GF470K
R976***	300-102	1K Ohm 1/4W 10% Comp	01121	RC07GF102K
R977	300-472	4.7K Ohm 1/4W 10% Comp	01121	RC07GF472K
R978-R996	-	Not assigned		
R997**	315-013	2.80K Ohm 1/8W 1% Met Film	91637	RN60C2801F
R998**	306-011 (2)	1.0 Ohm 10W 3% WW Parallel	91637	RS10
R999**	306-010	1.0 Ohm 12.5W LIN VAR	44655	E#0101
S801	210-005	Switch, rotary SP10T	18786	
S802	210-013	Switch, rotary 12P4T	18786	
V901	-	Microwave tube see page 1		

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
Z801	-	Not assigned		
Z802**-Z804	501-014	DIODE	03877	IN989
Z805-Z815	-	Not assigned		
Z816	501-007	DIODE	03877	IN753A
Z817-Z819	501-008	DIODE	03877	IN759
Z820	501-007	DIODE	03877	IN753A
Z821-Z823	-	Not assigned		
Z824	501-007	DIODE	03877	IN753A
Z825	501-008	DIODE	03877	IN759
Z826	501-007	DIODE	03877	IN753A
Z827	-	see parts list for specific unit		
Z828	-	Not assigned		
Z829	501-007	DIODE	03877	IN753A
Z830,Z831	-	Not assigned		
Z832	501-008	DIODE	03877	IN759
Z833,Z834	-	Not assigned		
Z835	501-008	DIODE	03877	IN759
Z836	501-007	DIODE	03877	IN753A
Z837-Z841	-	Not assigned		
Z842	501-007	DIODE	03877	IN753A
Z843	-	Not assigned		
Z844-Z846	501-007	DIODE	03877	IN753A
Z847,Z848	501-008	DIODE	03877	IN759

* Not included in VTM and BWO units with "B" suffix.

** Included in VTM units only.

*** The above value for BWO units only. For VTM units see specific parts list.

**** For D or DL units, see specific parts list.

OSCILLATOR UNIT -PARTS LIST FOR MODEL H24MD

Reference Designation	Micro-Power Part Number	Description	Code. Ident	Mfg No.
-	209-024	Scale	18786	
AT901	573-001	6 dB Pad	00929	AA-06N
C811	420-040	0.0047uF 1kV 20% Cer	56289	5GA-D47
C820	420-040	0.0047uF 1kV 20% Cer	56289	5GA-D47
CR827	500-005q	DIODE	14099	SCE2
FL901	-	omit		
Q807,Q808	-	omit		
Q830-Q832	-	omit		
R817	-	omit		
R818	-	jumper		
R822	-	omit		
R824-R842	-	omit		
R845,R846	-	jumper		
R847	315-035	15.4K Ohm 1/8W 1% Met Film	91637	RN60C1542F
R849,R850	304-006	10K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-062	11.8K Ohm 1/8W 1% Met Film	91637	RN60C1182F
R860	315-016	10.5K Ohm 1/8W 1% Met Film	91637	RN60C1052F
R867,R871	300-332	3.3K Ohm 1/4W 10% Comp	01121	RC07GF332K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R900	301-101	100 Ohm 1/2W 10% Comp	01121	RC20GF101K
R901	315-026	1.87K Ohm 1/8W 1% Met Film	91637	RN60C1871F
R905	-	jumper		
R937	-	omit		
R954	315-002	17.4 Ohm 1/8W 1% Met Film	91637	RN60C17R4F
R955	315-004	34.8 Ohm 1/8W 1% Met Film	91637	RN60C34R8F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-007	174 Ohm 1/8W 1% Met Film	91637	RN60C1740F
R958	315-009	348 Ohm 1/8W 1% Met Film	91637	RN60C3480F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-012	1.74K Ohm 1/8W 1% Met Film	91637	RN60C1741F
R961	315-014	3.48K Ohm 1/8W 1% Met Film	91637	RN60C3481F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F

OSCILLATOR UNIT - PARTS LIST FOR MODEL H25MD

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-022	Scale	18786	
AT901	573-001	6 dB Pad	00929	AA-06N
C811	420-040	0.0047uF 1kV 20% Cer	56289	5GA-D47
C820	420-040	0.0047uF 1kV 20% Cer	56289	5GA-D47
CR829	500-005	DIODE	14099	SCE2
FL901	-	omit		
Q807,Q808	-	omit		
Q830-Q832	-	omit		
R817	-	omit		
R818	315-074	75.0K Ohm 1/8W 1% Met Film	91637	RN60C7502F
R822	-	omit		
R824-R842	-	omit		
R845,R846	-	jumper		
R847	315-062	11.8K Ohm 1/8W 1% Met Film	91637	RN60C1182F
R849,R850	304-022	2K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-062	11.8K Ohm 1/8W 1% Met Film	01637	RN60C1182F
R860	315-091	9.53K Ohm 1/8W 1% Met Film	91637	RN60C9531F
R867,R871	300-332	3.3K Ohm 1/4W 10% Comp	01121	RC07GF332K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R900	301-101	100 Ohm 1/2W 10% Comp	01121	RC20GF101K
R901	300-152	1.5K Ohm 1/4W 10% Comp	01121	RC07GF152K
R905	-	jumper		
R937	-	omit		
R954	315-001	14.0 Ohm 1/8W 1% Met Film	91637	RN60C14R0F
R955	315-003	28.0 Ohm 1/8W 1% Met Film	91637	RN60C28R0F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-006	140 Ohm 1/8W 1% Met Film	91637	RN60C1400F
R958	315-008	280 Ohm 1/8W 1% Met Film	91637	RN60C2800F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-011	1.4K Ohm 1/8W 1% Met Film	91637	RN60C1401F
R961	315-013	2.8K Ohm 1/8W 1% Met Film	91637	RN60C2801F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F

OSCILLATOR UNIT - PARTS LIST FOR MODEL H37MD

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-021	Scale	18786	
AT901	573-001	6 dB Pad	00929	AA-06N
C811	420-040	0.0047uF 1kV 20% Cer	56289	5GA-D47
C820	420-040	0.0047 1kV 20% Cer	56289	5GA-D47
CR827	500-005	DIODE	14099	SCE2
FL901	-	omit		
Q807,Q808	-	omit		
Q830-Q832	-	omit		
R817	-	omit		
R818	-	jumper		
R822	-	omit		
R824-R842	-	omit		
R845,R846	-	jumper		
R847	315-035	15.4K Ohm 1/8W 1% Met Film	91637	RN60C1542F
R849,R850	304-006	10K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-062	11.8K Ohm 1/8W 1% Met Film	91637	RN60C1182F
R860	315-016	10.5K Ohm 1/8W 1% Met Film	91637	RN60C1052F
R867,R871	300-332	3.3K Ohm 1/4W 10% Comp	01121	RC07GF332K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R900	301-101	100 Ohm 1/2W 10% Comp	01121	RC20GF101K
R901	315-026	1.87K Ohm 1/8W 1% Met Film	91637	RN60C1872F
R905	-	jumper		
R937	-	omit		
R954	315-001	14.0 Ohm 1/8W 1% Met Film	91637	RN60C14R0F
R955	315-003	28.0 Ohm 1/8W 1% Met Film	91637	RN60C28R0F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-006	140 Ohm 1/8W 1% Met Film	91637	RN60C1400F
R958	315-008	280 Ohm 1/8W 1% Met Film	91637	RN60C2800F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-011	1.40K Ohm 1/8W 1% Met Film	91637	RN60C1401F
R961	315-013	2.80K Ohm 1/8W 1% Met Film	91637	RN60C2801F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F

OSCILLATOR UNIT - PARTS LIST FOR MODEL H41MD

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-028	Scale	18786	
AT901	573-001	6 dB Pad	60929	AA-06N
C811	420-040	0.0047uF 1kV 20% Cer	56289	5GA-D47
C820	420-040	0.0047uF 1kV 20% Cer	56289	5GA-D47
CR827	500-005	DIODE	14099	SCE2
FL901	-	omit		
Q807,Q808	-	omit		
Q830-Q832	-	omit		
R817	-	omit		
R818	315-019	100K Ohm 1/8W 10% Met Film	91637	RN60C1003F
R822	-	omit		
R824-R842	-	omit		
R845,R846	-	jumper		
R847	315-035	15.4K Ohm 1/8W 1% Met Film	91637	RN60C1542F
R849,R850	304-022	2K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F
R860	315-078	5.90K Ohm 1/8W 1% Met Film	91637	RN60C5901F
R867,R871	300-332	3.3K Ohm 1/4W 10% Comp	01121	RC07GF332K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R900	301-101	100 Ohm 1/2W 10% Comp	01121	RC20GF101K
R901	315-009	348 Ohm 1/8W 1% Met Film	91637	RN60C3480F
R905	-	jumper		
R937	-	omit		
R954	315-002	17.4 Ohm 1/8W 1% Met Film	91637	RN60C17R4F
R955	315-004	34.8 Ohm 1/8W 1% Met Film	91637	RN60C34R8F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-007	174 Ohm 1/8W 1% Met Film	91637	RN60C1740F
R958	315-009	348 Ohm 1/8W 1% Met Film	91637	RN60C3480F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-012	1.74K Ohm 1/8W 1% Met Film	91637	RN60C1741F
R961	315-014	3.48K Ohm 1/8W 1% Met Film	91637	RN60C3481F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-010	Scale	18786	
AT901	-	omit		
C820*	-	omit		
FL901	-	omit		
Q811*	502-013	TRANSISTOR	01295	2N3703
Q812*	502-005	TRANSISTOR	01295	2N697
Q819*	502-010	TRANSISTOR	01295	2N3707
R817	315-027	3.16K Ohm 1/8W 1% Met Film	91637	RN60C3161F
R818	315-020	49.9K Ohm 1/8W 1% Met Film	91637	RN60C4992F
R822	305-060	182 Ohm 3W 1% WW	91637	RW79U1820F
R824-R832	315-052	40.2 Ohm 1/4W 1% Met Film	91637	RN60C40R2F
R833	-	omit		
R834	315-075	56.2K Ohm 1/8W 1% Met Film	91637	RN60C5622F
R835	-	omit		
R836	315-048	105K Ohm 1/8W 1% Met Film	91637	RN60C1053F
R837	315-024	80.6K Ohm 1/8W 1% Met Film	91637	RN60C8062F
R838	315-051	147K Ohm 1/8W 1% Met Film	91637	RN60C1473F
R839	300-274	270K Ohm 1/4W 5% Comp	01121	RC07GF274J
R840,R841	315-025	165K Ohm 1/8W 1% Met Film	91637	RN60C1653F
R842	-	omit		
R845	315-050	121K Ohm 1/8W 1% Met Film	91637	RN60C1213F
R846	315-021	33.2K Ohm 1/8W 1% Met Film	91637	RN60C3322F
R847	315-033	2x 46.4K Ohm 1/8W 1% in series Met Film	91637	RN60C4642F
R849,R850	304-006	10K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-023	40.2K Ohm 1/8W 1% Met Film	91637	RN60C4022F
R860	315-021	33.2K Ohm 1/8W 1% Met Film	91637	RN60C3322F
R867	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R871	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R900	301-101	100 Ohm 1/2W 10% Comp	01121	RC20GF101K
R901	315-038	4.32K Ohm 1/8W 1% Met Film	91637	RN60C4321F
R905*	-	jumper		
R937	304-017	100 Ohm 1/8W LIN VAR	71450	U201
R954	315-001	14.0 Ohm 1/8W 1% Met Film	91637	RN60C14R0F
R955	315-003	28.0 Ohm 1/8W 1% Met Film	91637	RN60C28R0F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-006	140 Ohm 1/8W 1% Met Film	91637	RN60C1400F
R958	315-008	280 Ohm 1/8W 1% Met Film	91637	RN60C2800F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-011	1.40K Ohm 1/8W 1% Met Film	91637	RN60C1401F
R961	315-013	2.80K Ohm 1/8W 1% Met Film	91637	RN60C2801F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F
Z827	500-005	DIODE	14099	SCE2

* To be used for D Model only

OSCILLATOR UNIT - PARTS LIST FOR MODEL H51MD

Reference Designation	Micro-Power Part Number	Designation				Code Ident	Mfg No
-	209-010	Scale				18786	
AT901	573-001	6 dB Pad				00929	AA-06N
C811	420-040	0.0047uF	1kV	20%	Cer	56289	5GA-D47
C820	420-040	0.0047uF	1kV	20%	Cer	56289	5GA-D47
CR827	500-005	DIODE				14099	SCE2
FL901	-	omit					
Q807,Q808	-	omit					
Q830-Q832	-	omit					
R817	-	omit					
R818	300-154	150K Ohm	1/4W	10%	Comp	01121	RC07GF154K
R822	-	omit					
R824-R842	-	omit					
R845,R846	-	jumper					
R847	315-016	10.5K Ohm	1/8W	1%	Met Film	91637	RN60C1052F
R849,R850	304-006	10K Ohm	1/2W	LIN	Multiturn	91637	2387
R859	315-078	5.90K Ohm	1/8W	1%	Met Film	91637	RN60C5901F
R860	315-056	4.53K Ohm	1/8W	1%	Met Film	91637	RN60C4531F
R867,R871	300-332	3.3K Ohm	1/4W	10%	Comp	01121	RC07GF332K
R880	300-103	10K Ohm	1/4W	10%	Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm	1/4W	10%	Comp	01121	RC07GF222K
R900	301-101	100 Ohm	1/2W	10%	Comp	01121	RC20GF101K
R901	300-102	1K Ohm	1/4W	10%	Comp	01121	RC07GF102K
R905	-	jumper					
R937	-	omit					
R954	315-001	14.0 Ohm	1/8W	1%	Met Film	91637	RN60C14R0F
R955	315-003	28.0 Ohm	1/8W	1%	Met Film	91637	RN60C28R0F
R956	315-005	69.8 Ohm	1/8W	1%	Met Film	91637	RN60C69R8F
R957	315-006	140 Ohm	1/8W	1%	Met Film	91637	RN60C1400F
R958	315-008	280 Ohm	1/8W	1%	Met Film	91637	RN60C2800F
R959	315-010	698 Ohm	1/8W	1%	Met Film	91637	RN60C6980F
R960	315-011	1.4K Ohm	1/8W	1%	Met Film	91637	RN60C1401F
R961	315-013	2.8K Ohm	1/8W	1%	Met Film	91637	RN60C2801F
R962	315-015	6.98K Ohm	1/8W	1%	Met Film	91637	RN60C6981F

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-034	Scale	18786	
AT901	573-001	6 dB Pad	00929	AA06N
C811, C820	420-040	0.0047uF 1kV 20% Cer	56289	5GA-D47
CR827	500-005	DIODE	14099	SCE2
FL901	-	omit		
Q807,Q808	-	omit		
Q830-Q832	-	omit		
R817	-	omit		
R818	315-019	100K Ohm 1/8W 1% Met Film	91637	RN60C1003F
R822	-	omit		
R824-R842	-	omit		
R845,R846	-	jumper		
R847	315-016	10.5K Ohm 1/8W 1% Met Film	91637	RN60C1052F
R849,R850	304-006	10K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-062	11.8K Ohm 1/8W 1% Met Film	91637	RN60C1182F
R860	315-056	4.53K Ohm 1/8W 1% Met Film	91637	RN60C4531F
R867,R871	300-332	3.3K Ohm 1/4W 10% Comp	01121	RC07GF332K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R900	301-101	100 Ohm 1/2W 10% Comp	01121	RC20GF101K
R901	300-102	1K Ohm 1/4W 10% Comp	01121	RC07GF102K
R905	-	jumper		
R937	-	omit		
R954	315-002	17.4 Ohm 1/8W 1% Met Film	91637	RN60C17R4F
R955	315-004	34.8 Ohm 1/8W 1% Met Film	91637	RN60C34R8F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-007	174 Ohm 1/8W 1% Met Film	91637	RN60C1740F
R958	315-009	348 Ohm 1/8W 1% Met Film	91637	RN60C3480F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-012	1.74K Ohm 1/8W 1% Met Film	91637	RN60C1741F
R961	315-014	3.48K Ohm 1/8W 1% Met Film	91637	RN60C3481F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	01637	RN60C6981F

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-033	Scale	18786	
AT901	573-001	6 dB Pad	00929	AA-06N
C811	420-040	0.0047uF 1kV 20% Cer	56289	5GA-D47
C820	420-040	0.0047uF 1kV 20% Cer	56289	5GA-D47
CR827	500-005	DIODE	14099	SCE2
FL901	-	omit		
Q807,Q808	-	omit		
Q830-Q832	-	omit		
R817	-	omit		
R818	300-224	220K Ohm 1/4W 10% Comp	01121	RC07GF224K
R822	-	omit		
R824-R842	-	omit		
R845,R846	-	0 Ohm (jumper)		
R847	315-016	10.5K Ohm 1/8W 1% Met Film	91637	RN60C1052F
R849,R850	304-006	10K Ohm 1/2W LIN Multiturn	91637	RN60C1002F
R859	315-078	5.9K Ohm 1/8W 1% Met Film	91637	RN60C5901F
R860	315-056	4.53K Ohm 1/8W 1% Met Film	91637	RN60C4531F
R867,R871	300-332	3.3K Ohm 1/4W 10% Comp	01121	RC07GF332K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R900	301-101	100 Ohm 1/2W 10% Comp	01121	RC07GF101K
R901	300-102	1K Ohm 1/4W 10% Comp	01121	RC07GF102K
R905	-	0 Ohm (jumper)		
R937	-	omit		
R954	315-001	14.0 Ohm 1/8W 1% Met Film	91637	RN60C14R0F
R955	315-003	28.0 Ohm 1/8W 1% Met Film	91637	RN60C28R0F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-006	140 Ohm 1/8W 1% Met Film	91637	RN60C1400F
R958	315-008	280 Ohm 1/8W 1% Met Film	91637	RN60C2800F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-011	1.40K Ohm 1/8W 1% Met Film	91637	RN60C1401F
R961	315-013	2.80K Ohm 1/8W 1% Met Film	91637	RN60C2801F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F

OSCILLATOR UNIT - PARTS LIST FOR MODEL H102, L, D, DL

Watkins-Johnson (Stewart Tube)

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-011	Scale	18786	
AT901	-	omit		
C820**	420-040	0.0047uF 1kV 20% Cer	56289	5GA-D47
FL901	-	omit		
Q811**	502-013	TRANSISTOR	01295	2N3703
Q812**	502-005	TRANSISTOR	01295	2N697
Q819**	502-010	TRANSISTOR	01295	2N3707
R817	315-027	3.16K Ohm 1/8W 1% Met Film	91637	RN60C3161F
R818	315-017	66.5K Ohm 1/8W 1% Met Film	91637	RN60C6652F
R822	305-046	147 Ohm 3W 1% WW	91637	RW79U1470F
R824-R832	315-052	40.2 Ohm 1/8W 1% Met Film	91637	RN60C40R2F
R833	-	omit		
R834	315-029	60.4K Ohm 1/8W 1% Met Film	91637	RN60C6042F
R835	315-037	69.8K Ohm 1/8W 1% Met Film	91637	RN60C6982F
R836	315-024	80.6K Ohm 1/8W 1% Met Film	91637	RN60C8062F
R837	315-017	66.5K Ohm 1/8W 1% Met Film	91637	RN60C6652F
R838	-	omit		
R839	315-020	49.9K Ohm 1/8W 1% Met Film	91637	RN60C4992F
R840	315-042	86.6K Ohm 1/8W 1% Met Film	91637	RN60C8662F
R841,R842	-	omit		
R845	300-473	47K Ohm 1/4W 10% Comp	01121	RC07GF473K
R846	315-028	16.5K Ohm 1/8W 1% Met Film	91637	RN60C1652F
R847	315-020	49.9K Ohm 1/8W 1% Met Film	91637	RN60C4992F
R849,R850	304-022	2K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-069	18.7K Ohm 1/8W 1% Met Film	91637	RN60C1872F
R860	315-035	15.4K Ohm 1/8W 1% Met Film	91637	RN60C1542F
R867	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R871	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R900	301-101	100 Ohm 1/2W 10% Comp	01121	RC20GF101K
R901	315-046	1.96K Ohm 1/8W 1% Met Film	91637	RN60C1961F
R905**	-	jumper		
R937	304-017	100 Ohm 1/8W LIN VAR	71450	U201
R954	315-002	17.4 Ohm 1/8W 1% Met Film	91637	RN60C17R4F
R955	315-004	34.8 Ohm 1/8W 1% Met Film	91637	RN60C34R8F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-007	174 Ohm 1/8W 1% Met Film	91637	RN60C1740F
R958	315-009	348 Ohm 1/8W 1% Met Film	91637	RN60C3480F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-012	1.74K Ohm 1/8W 1% Met Film	91637	RN60C1741F
R961	315-014	3.48K Ohm 1/8W 1% Met Film	91637	RN60C3481F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F
Z827	500-005	DIODE	14099	SCE2

* Applicable to DL units only.
** For D & DL units only.

OSCILLATOR UNIT - PARTS LIST FOR MODEL H102, L, D, DL

(ITT Tube)

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-011	Scale	18786	
AT901	-	omit		
C820**	420-040	0.0047uF 1kV 20% Cer	56289	5GA-D47
FL901	-	omit		
Q811**	502-013	TRANSISTOR	01295	2N3703
Q812**	502-005	TRANSISTOR	01295	2N697
Q819**	502-010	TRANSISTOR	01295	2N3707
R817	315-027	3.16K Ohm 1/8W 1% Met Film	91637	RN60C3161F
R818	315-019	100K Ohm 1/8W 1% Met Film	91637	RN60C1003F
R822	305-046	147 Ohm 3W 1% W.W.	91637	RW79U1470F
R824-R832	315-052	40.2 Ohm 1/8W 1% Met Film	91637	RN60C40R2F
R833	315-080	30.1K Ohm 1/8W 1% Met Film	91637	RN60C3012F
R834	315-024	80.6K Ohm 1/8W 1% Met Film	91637	RN60C8062F
R835	315-042	86.6K Ohm 1/8W 1% Met Film	91637	RN60C8662F
R836	315-023	40.2K Ohm 1/8W 1% Met Film	91637	RN60C4022F
R837	315-050	121K Ohm 1/8W 1% Met Film	91637	RN60C1213F
R838	315-051	147K Ohm 1/8W 1% Met Film	91637	RN60C1473F
R839	315-023	40.2K Ohm 1/8W 1% Met Film	91637	RN60C4022F
R840	-	omit		
R841	315-019	100K Ohm 1/8W 1% Met Film	91637	RN60C1003F
R842	-	omit		
R845	315-024	80.6K Ohm 1/8W 1% Met Film	91637	RN60C8062F
R846	315-032	19.1K Ohm 1/8W 1% Met Film	91637	RN60C1912F
R847	315-017	66.5K Ohm 1/8W 1% Met Film	91637	RN60C6652F
R849,R850	304-022	2K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-031	20.5K Ohm 1/8W 1% Met Film	91637	RN60C2052F
R860	315-068	20.0K Ohm 1/8W 1% Met Film	91637	RN60C2002F
R867	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R871	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R880	300-472	4.7K Ohm 1/4W 10% Comp	01121	RC07GF472K
R896	-	jumper		
R900	301-101	100 Ohm 1/2W 10% Comp	01121	RC20GF101K
R901	315-055	2.49K Ohm 1/8W 1% Met Film	91637	RN60C2491F
R905**	-	jumper		
R937	304-017	100 Ohm 1/8W LIN VAR	71450	U201
R954	315-002	17.4 Ohm 1/8W 1% Met Film	91637	RN60C17R4F
R955	315-004	34.8 Ohm 1/8W 1% Met Film	91637	RN60C34R8F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-007	174 Ohm 1/8W 1% Met Film	91637	RN60C1740F
R958	315-009	348 Ohm 1/8W 1% Met Film	91637	RN60C3480F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-012	1.74K Ohm 1/8W 1% Met Film	91637	RN60C1741F
R961	315-014	3.48K Ohm 1/8W 1% Met Film	91637	RN60C3481F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F
Z827	501-007	DIODE	03877	1N753A

** Applicable to D and DL units only.

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-027	Scale	18786	
AT901	-	omit		
C820**	420-040	0.0047uF 1kV 20% Cer	56289	5GA-D47
FL901	-	omit		
Q811**	502-013	TRANSISTOR	01295	2N3703
Q812**	502-005	TRANSISTOR	01295	2N697
Q819**	502-010	TRANSISTOR	01295	2N3707
R817	315-027	3.16K Ohm 1/8W 1% Met Film	91637	RN60C3161F
R818	-	jumper		
R822	305-063	215 Ohm 3W 1% WW	91637	RW79U2150F
R824-R832	315-052	40.2 Ohm 1/8W 1% Met Film	91637	RN60C40R2F
R833	315-080	30.1K Ohm 1/8W 1% Met Film	91637	RN60C3012F
R834	315-019	100K Ohm 1/8W 1% Met Film	91637	RN60C1003F
R835	-	omit		
R836	315-076	44.2K Ohm 1/8W 1% Met Film	91637	RN60C4422F
R837	-	omit		
R838	315-019	100K Ohm 1/8W 1% Met Film	91637	RN60C1003F
R839	315-074	75K Ohm 1/8W 1% Met Film	91637	RN60C7502F
R840	-	omit		
R841	315-029	60.4K Ohm 1/8W 1% Met Film	91637	RN60C6042F
R842	-	omit		
R845	300-333	33K Ohm 1/4W 10% Comp	01121	RC07GF333K
R846	315-065	15.8K Ohm 1/8W 1% Met Film	91637	RN60C1582F
R847	315-030	35.7K Ohm 1/8W 1% Met Film	91637	RN60C3572F
R849,R850	304-022	2K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-085	21.0K Ohm 1/8W 1% Met Film	91637	RN60C2102F
R860	315-070	17.8K Ohm 1/8W 1% Met Film	91637	RN60C1782F
R867	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R871	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R900	301-101	100 Ohm 1/2W 10% Comp	01121	RC20GF101K
R901	315-039	2.15K Ohm 1/8W 1% Met Film	91637	RN60C2151F
R905**	-	jumper		
R937	304-017	100 Ohm 1/8W LIN VAR	71450	U201
R954	315-001	14.0 Ohm 1/8W 1% Met Film	91637	RN60C14R0F
R955	315-003	28.0 Ohm 1/8W 1% Met Film	91637	RN60C28R0F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-006	140 Ohm 1/8W 1% Met Film	91637	RN60C1400F
R958	315-008	280 Ohm 1/8W 1% Met Film	91637	RN60C2800F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-011	1.40K Ohm 1/8W 1% Met Film	91637	RN60C1401F
R961	315-013	2.80K Ohm 1/8W 1% Met Film	91637	RN60C2801F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F
Z827	500-005	DIODE	14099	SCE2

** Applicable to D and DL units only.

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-012	Scale	18786	
AT901	-	omit		
C820**	420-040	0.0047uF 1kV 20% Cer	56289	5GA-D47
FL901	574-002	FILTER (H204DL only)	12598	F-30-4000
Q811**	502-013	TRANSISTOR	01295	2N3703
Q812**	502-005	TRANSISTOR	01295	2N697
Q819**	502-010	TRANSISTOR	01295	2N3707
R817	315-027	3.16K Ohm 1/8W 1% Met Film	91637	RN60C3161F
R818	315-019	100K Ohm 1/8W 1% Met Film	91637	RN60C1003F
R822	305-046	147 Ohm 3W 1% WW	91637	RW79U1470F
R824-R832	315-052	40.2 Ohm 1/8W 1% Met Film	91637	RN60C40R2F
R833		omit		
R834	315-033	46.4K Ohm 1/8W 1% Met Film	91637	RN60C4642F
R835	315-023	40.2K Ohm 1/8W 1% Met Film	91637	RN60C4022F
R836	315-113	43.2K Ohm 1/8W 1% Met Film	91637	RN60C4322F
R837	315-029	60.4K Ohm 1/8W 1% Met Film	91637	RN60C6042F
R838	315-080	30.1K Ohm 1/8W 1% Met Film	91637	RN60C3012F
R839	315-024	80.6K Ohm 1/8W 1% Met Film	91637	RN60C8062F
R840	315-033	46.4K Ohm 1/8W 1% Met Film	91637	RN60C4642F
R841	315-020	49.9K Ohm 1/8W 1% Met Film	91637	RN60C4992F
R842	315-025	165K Ohm 1/8W 1% Met Film	91637	RN60C1653F
R845	300-473	47K Ohm 1/4W 10% Comp	01121	RC07GF473K
R846	315-035	15.4K Ohm 1/8W 1% Met Film	91637	RN60C1542F
R847	315-020	49.9K Ohm 1/8W 1% Met Film	91637	RN60C4992F
R849,R850	304-022	2K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-032	19.1K Ohm 1/8W 1% Met Film	91637	RN60C1912F
R860	315-065	15.8K Ohm 1/8W 1% Met Film	91637	RN60C1582F
R867	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R871	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R900	301-101	100 Ohm 1/2W 10% Comp	01121	RC20GF101K
R901	315-040	1.96K Ohm 1/8W 1% Met Film	91637	RN60C1961F
R905**	-	jumper		
R937	304-017	100 Ohm 1/8W LIN VAR	71450	U201
R954	315-002	17.4 Ohm 1/8W 1% Met Film	91637	RN60C17R4F
R955	315-004	34.8 Ohm 1/8W 1% Met Film	91637	RN60C34R8F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-007	174 Ohm 1/8W 1% Met Film	91637	RN60C1740F
R958	315-009	348 Ohm 1/8W 1% Met Film	91637	RN60C3480F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-012	1.74K Ohm 1/8W 1% Met Film	91637	RN60C1741F
R961	315-014	3.48K Ohm 1/8W 1% Met Film	91637	RN60C3481F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F
Z827	500-005	DIODE	14099	SCE2

** Applicable to D and DL units only.

OSCILLATOR UNIT - PARTS LIST FOR MODEL H204A, LA, DA, DLA

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-020	Scale	18786	
AT901	-	omit		
C820**	420-040	0.0047uF 1kV 20% Cer	56289	5GA-D47
CR827	500-005	DIODE	14099	SCE2
FL901	574-002	Filter (H204DLA only)	12598	F-30-4000
Q811**	502-013	TRANSISTOR	01295	2N3703
Q812**	502-005	TRANSISTOR	01295	2N697
Q819**	502-010	TRANSISTOR	01295	2N3707
R817	315-027	3.16K Ohm 1/8W 1% Met Film	91637	RN60C3161F
R818	315-019	100K Ohm 1/8W 1% Met Film	91637	RN60C1003F
R822	305-048	98 Ohm 3W 1% WW	91637	RW79U0980F
R824-R832	315-052	40.2 Ohm 1/8W 1% Met Film	91637	RN60C40R2F
R833	-	omit		
R834	315-028	16.5K Ohm 1/8W 1% Met Film	91637	RN60C1652F
R835	315-022	24.9K Ohm 1/8W 1% Met Film	91637	RN60C2492F
R836	315-021	33.2K Ohm 1/8W 1% Met Film	91637	RN60C3322F
R837	315-033	46.4K Ohm 1/8W 1% Met Film	91637	RN60C4642F
R838	315-034	27.4K Ohm 1/8W 1% Met Film	91637	RN60C2742F
R839	315-023	40.2K Ohm 1/8W 1% Met Film	91637	RN60C4022F
R840	315-033	46.4K Ohm 1/8W 1% Met Film	91637	RN60C4642F
R841	315-029	60.4K Ohm 1/8W 1% Met Film	91637	RN60C6042F
R842	315-025	165K Ohm 1/8W 1% Met Film	91637	RN60C1653F
R845	300-104	100K Ohm 1/4W 10% Comp	01121	RC07GF104K
R846	315-036	16.9K Ohm 1/8W 1% Met Film	91637	RN60C1692F
R847	315-024	80.6K Ohm 1/8W 1% Met Film	91637	RN60C8062F
R849,R850	304-022	2K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-069	18.7K Ohm 1/8W 1% Met Film	91637	RN60C1872F
R860	315-035	15.4K Ohm 1/8W 1% Met Film	91637	RN60C1542F
R867	300-332	3.3K Ohm 1/4W 10% Comp	01121	RC07GF332K
R871	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R900	301-101	100 Ohm 1/2W 10% Comp	01121	RC20GF101K
R901	300-152	1.5K Ohm 1/4W 10% Comp	01121	RC07GF152K
R905**	-	jumper		
R937	304-017	100 Ohm 1/8W LIN VAR	71450	U201
R954	315-001	14.0 Ohm 1/8W 1% Met Film	91637	RN60C14R0F
R955	315-003	28.0 Ohm 1/8W 1% Met Film	91637	RN60C28R0F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-006	140 Ohm 1/8W 1% Met Film	91637	RN60C1400F
R958	315-008	280 Ohm 1/8W 1% Met Film	91637	RN60C2800F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-011	1.40K Ohm 1/8W 1% Met Film	91637	RN60C1401F
R961	315-013	2.80K Ohm 1/8W 1% Met Film	91637	RN60C2801F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F

** Applicable to DA and DLA units only.

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-026	Scale	18786	
AT901	-	omit		
C820**	420-040	0.0047uF 1kV 10% Cer	56289	5GA-D47
FL901	-	omit		
Q811**	502-013	TRANSISTOR	01295	2N3703
Q812**	502-005	TRANSISTOR	01295	2N697
Q819**	502-010	TRANSISTOR	01295	2N3707
R817	315-027	3.16K Ohm 1/8W 1% Met Film	91637	RN60C3161F
R818	315-019	100K Ohm 1/8W 1% Met Film	91637	RN60C1003F
R822	305-035	160 Ohm 3W 1% WW	91637	RW79U1600F
R824-R832	315-052	40.2 Ohm 1/8W 1% Met Film	91637	RN60C40R2F
R833	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F
R834	315-076	44.2K Ohm 1/8W 1% Met Film	91637	RN60C4422F
R835	315-075	56.2K Ohm 1/8W 1% Met Film	91637	RN60C5622F
R836	315-023	40.2K Ohm 1/8W 1% Met Film	91637	RN60C4022F
R837	315-074	75.0K Ohm 1/8W 1% Met Film	91637	RN60C7502F
R838	315-076	44.2K Ohm 1/8W 1% Met Film	91637	RN60C4422F
R839	315-075	56.2K Ohm 1/8W 1% Met Film	91637	RN60C5622F
R840	315-024	80.6K Ohm 1/8W 1% Met Film	91637	RN60C8062F
R841	315-020	49.9K Ohm 1/8W 1% Met Film	91637	RN60C4992F
R842	-	omit		
R845	300-333	33K Ohm 1/4W 10% Comp	01121	RC07GF333K
R846	315-077	12.7K Ohm 1/8W 1% Met Film	91637	RN60C1272F
R847	315-030	35.7K Ohm 1/8W 1% Met Film	91637	RN60C3572F
R849,R850	304-022	2K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-035	15.4K Ohm 1/8W 1% Met Film	91637	RN60C1542F
R860	315-093	13.0K Ohm 1/8W 1% Met Film	91637	RN60C1302F
R867	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R871	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R900	301-101	100 Ohm 1/2W 10% Comp	01121	RC20GF101K
R901	300-102	1K Ohm 1/4W 10% Comp	01121	RC07GF102K
R905**	-	jumper		
R937	304-018	1K Ohm 1/8W LIN VAR	71450	U201
R954	315-001	14.0 Ohm 1/8W 1% Met Film	91637	RN60C14R0F
R955	315-003	28.0 Ohm 1/8W 1% Met Film	91637	RN60C28R0F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-006	140 Ohm 1/8W 1% Met Film	91637	RN60C1400F
R958	315-008	280 Ohm 1/8W 1% Met Film	91637	RN60C2800F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-011	1.40K Ohm 1/8W 1% Met Film	91637	RN60C1401F
R961	315-013	2.80K Ohm 1/8W 1% Met Film	91637	RN60C2801F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F
Z827	500-005	DIODE	14099	SCE2
		** For D and DL units only.		

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-013	Scale	18786	
AT901	-	omit		
C820**	420-040	0.0047uF 1kV 20% Cer	56289	5GA-D47
FL901	574-001	FILTER	12598	F-30-8000N
Q811**	502-013	TRANSISTOR	01295	2N3703
Q812**	502-005	TRANSISTOR	01295	2N697
Q819**	502-010	TRANSISTOR	01295	2N3707
R817	315-027	3.16K Ohm 1/8W 1% Met Film	91637	RN60C3161F
R818	315-019	100K Ohm 1/8W 1% Met Film	91637	RN60C1003F
R822	305-045	137 Ohm 3W 1% WW	91637	RW79U1370F
R824-R832	315-052	40.2 Ohm 1/8W 1% Met Film	91637	RN60C40R2F
R833,R834	315-032	19.1K Ohm 1/8W 1% Met Film	91637	RN60C1912F
R835	-	omit		
R836	315-031	20.5K Ohm 1/8W 1% Met Film	91637	RN60C2052F
R837	315-029	60.4K Ohm 1/8W 1% Met Film	91637	RN60C6042F
R838	315-030	35.7K Ohm 1/8W 1% Met Film	91637	RN60C3572F
R839	315-029	60.4K Ohm 1/8W 1% Met Film	91637	RN60C6042F
R840,R841	315-017	66.5K Ohm 1/8W 1% Met Film	91637	RN60C6652F
R842	315-025	165K Ohm 1/8W 1% Met Film	91637	RN60C1653F
R845	300-473	47K Ohm 1/4W 10% Comp	01121	RC07GF473K
R846	315-035	15.4K Ohm 1/8W 1% Met Film	91637	RN60C1542F
R847	315-075	56.2K Ohm 1/8W 1% Met Film	91637	RN60C5622F
R849,R850	304-022	2K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-084	18.2K Ohm 1/8W 1% Met Film	91637	RN60C1822F
R860	315-088	15.0K Ohm 1/8W 1% Met Film	91637	RN60C1502F
R867	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R871	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R900	301-101	100 Ohm 1/2W 10% Comp	01121	RC20GF101K
R901	300-152	1.5K Ohm 1/4W 10% Comp	01121	RC07GF152K
R905**	-	jumper		
R937	304-018	1K Ohm 1/8W LIN VAR	71450	U201
R954	315-002	17.4 Ohm 1/8W 1% Met Film	91637	RN60C17R4F
R955	315-004	34.8 Ohm 1/8W 1% Met Film	91637	RN60C34R8F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-007	174 Ohm 1/8W 1% Met Film	91637	RN60C1740F
R958	315-009	348 Ohm 1/8W 1% Met Film	91637	RN60C3480F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-012	1.74K Ohm 1/8W 1% Met Film	91637	RN60C1741F
R961	315-014	3.48K Ohm 1/8W 1% Met Film	91637	RN60C3481F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F
Z827	500-005	DIODE	14099	SCE2
		** Applicable to D and DL units only.		

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-019	Scale	18786	
AT901	-	omit		
C820**	420-040	0.0047uF 1kV 20% Cer	56289	5GA-D47
CR827	500-005	DIODE	14099	SCE2
FL901	574-001	FILTER	12598	F-30-8000N
Q811**	502-013	TRANSISTOR	01295	2N3703
Q812**	502-005	TRANSISTOR	01295	2N697
Q819**	502-010	TRANSISTOR	01295	2N3707
R817	315-027	3.16K Ohm 1/8W 1% Met Film	91637	RN60C3161F
R818	315-019	100K Ohm 1/8W 1% Met Film	91637	RN60C1003F
R822	305-045	137 Ohm 3W 1% WW	91637	RW79U1370F
R824-R832	315-052	40.2 Ohm 1/8W 1% Met Film	91637	RN60C40R2F
R833	315-034	27.4K Ohm 1/8W 1% Met Film	91637	RN60C2742F
R834	315-021	33.2K Ohm 1/8W 1% Met Film	91637	RN60C3322F
R835	315-021	33.2K Ohm 1/8W 1% Met Film	91637	RN60C3322F
R836	315-030	35.7K Ohm 1/8W 1% Met Film	91637	RN60C3572F
R837	315-021	33.2K Ohm 1/8W 1% Met Film	91637	RN60C3322F
R838	315-024	80.6K Ohm 1/8W 1% Met Film	91637	RN60C8062F
R839	315-023	40.2K Ohm 1/8W 1% Met Film	91637	RN60C4022F
R840	315-019	100K Ohm 1/8W 1% Met Film	91637	RN60C1003F
R841	315-020	49.9K Ohm 1/8W 1% Met Film	91637	RN60C4992F
R842	-	omit		
R845	300-473	47K Ohm 1/4W 10% Comp	01121	RC07GF473K
R846	315-028	16.5K Ohm 1/8W 1% Met Film	91637	RN60C1652F
R847	315-075	56.2K Ohm 1/8W 1% Met Film	91637	RN60C5622F
R849,R850	304-022	2K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-032	19.1K Ohm 1/8W 1% Met Film	91637	RN60C1912F
R860	315-066	16.2K Ohm 1/8W 1% Met Film	91637	RN60C1622F
R867	300-332	3.3K Ohm 1/4W 10% Comp	01121	RC07GF332K
R871	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R900	301-101	100 Ohm 1/2W 10% Comp	01121	RC20GF101K
R901	300-152	1.5K Ohm 1/4W 10% Comp	01121	RC07GF152K
R905**	-	jumper		
R937	304-018	1K Ohm 1/8W LIN VAR	71450	U201
R954	315-002	17.4 Ohm 1/8W 1% Met Film	91637	RN60C17R4F
R955	315-004	34.8 Ohm 1/8W 1% Met Film	91637	RN60C34R8F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-007	174 Ohm 1/8W 1% Met Film	91637	RN60C1740F
R958	315-009	348 Ohm 1/8W 1% Met Film	91637	RN60C3480F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-012	1.74K Ohm 1/8W 1% Met Film	91637	RN60C1741F
R961	315-014	3.48K Ohm 1/8W 1% Met Film	91637	RN60C3481F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F

** Applicable to DA and DLA units only.

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-023	Scale	18786	
AT901	-	omit		
C820*	420-040	0.0047 1kV 20% Cer	56289	5GA-D47
FL901	574-006	FILTER (L, DL Only)	12598	F30-12.4GC
Q811*	502-013	TRANSISTOR	01295	2N3703
Q812*	502-005	TRANSISTOR	01295	2N697
Q819*	502-010	TRANSISTOR	01295	2N3703
R817	315-027	3.16K Ohm 1/8W 1% Met Film	91637	RN60C3161F
R818	315-019	100 Ohm 1/8W 1% Met Film	91637	RN60C1003F
R822	305-064	264 Ohm 3W 1% WW	91637	RW79U2640F
R824-R832	315-052	40.2 Ohm 1/8W 1% Met Film	91637	RN60C40R2F
R833	315-075	56.2K Ohm 1/8W 1% Met Film	91637	RN60C5622F
R834	315-044	154K Ohm 1/8W 1% Met Film	91637	RN60C1543F
R835	315-037	69.8K Ohm 1/8W 1% Met Film	91637	RN60C6982F
R836	315-037	69.8K Ohm 1/8W 1% Met Film	91637	RN60C6982F
R837	315-074	75.0K Ohm 1/8W 1% Met Film	91637	RN60C7502F
R838	-	omit		
R839	315-024	80.6K Ohm 1/8W 1% Met Film	91637	RN60C8062F
R840	315-051	147K Ohm 1/8W 1% Met Film	91637	RN60C1473F
R841	315-024	80.6K Ohm 1/8W 1% Met Film	91637	RN60C8062F
R842	-	omit		
R845	300-473	47K Ohm 1/4W 10% Comp	01121	RC07GF473K
R846	315-071	21.5K Ohm 1/8W 1% Met Film	91637	RN60C2152F
R847	315-076	44.2K Ohm 1/8W 1% Met Film	91637	RN60C4422F
R849,R850	304-022	2K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-083	32.4K Ohm 1/8W 1% Met Film	91637	RN60C3242F
R860	315-089	26.7K Ohm 1/8W 1% Met Film	91637	RN60C2672F
R867	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R871	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R900*	302-471	470 Ohm 1W 10% Comp	01121	RC32GF471K
R901	315-081	3.01K Ohm 1/8W 1% Met Film	91637	RN60C3011F
R905*	-	jumper		
R937	304-018	1K Ohm 1/8W LIN VAR	71450	U201
R954	315-002	17.4 Ohm 1/8W 1% Met Film	91637	RN60C17R4F
R955	315-004	34.8 Ohm 1/8W 1% Met Film	91637	RN60C34R8F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-007	174 Ohm 1/8W 1% Met Film	91637	RN60C1740F
R958	315-009	348 Ohm 1/8W 1% Met Film	91637	RN60C3480F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-012	1.74K Ohm 1/8W 1% Met Film	91637	RN60C1741F
R961	315-014	3.48K Ohm 1/8W 1% Met Film	91637	RN60C3481F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F
Z827	500-005	DIODE	14099	SCE2
Z845*,Z846*	-	omit		

* Applicable to D & DL units only.

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-018	Scale	18786	
AT901	-	omit		
C820*	420-040	0.0047uF 1kV 20% Cer	56289	5GA-D47
FL901	574-006	FILTER (L, DL only)	12598	F30-12.4GHz
Q811*	502-013	TRANSISTOR	01295	2N3703
Q812*	502-005	TRANSISTOR	01295	2N697
Q819*	502-010	TRANSISTOR	01295	2N3707
R817	315-027	3.16K Ohm 1/8W 1% Met Film	91637	RN60C3161F
R818	315-019	100K Ohm 1/8W 1% Met Film	91637	RN60C1003F
R822	305-060	182 Ohm 3W 1% WW	91637	RW79U1820F
R824-R832	315-052	40.2 Ohm 1/8W 1% Met Film	91637	RN60C40R2F
R833	-	omit		
R834	315-020	49.9K Ohm 1/8W 1% Met Film	91637	RN60C4992F
R835	315-017	66.5K Ohm 1/8W 1% Met Film	91637	RN60C6652F
R836	315-023	40.2K Ohm 1/8W 1% Met Film	91637	RN60C4022F
R837	315-029	60.4K Ohm 1/8W 1% Met Film	91637	RN60C6042F
R838	315-052	86.6K Ohm 1/8W 1% Met Film	91637	RN60C8662F
R839	315-023	40.2K Ohm 1/8W 1% Met Film	91637	RN60C4022F
R840	-	omit		
R841	315-042	86.6K Ohm 1/8W 1% Met Film	91637	RN60C8662F
R842	-	omit		
R845	300-473	47K Ohm 1/4W 10% Comp	01121	RC07GF473K
R846	315-066	16.2K Ohm 1/8W 1% Met Film	91637	RN60C1622F
R847	315-076	44.2K Ohm 1/8W 1% Met Film	91637	RN60C4422F
R849,R850	304-022	2K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-085	21.0K Ohm 1/8W 1% Met Film	91637	RN60C2102F
R860	315-002	17.4K Ohm 1/8W 1% Met Film	91637	RN60C1742F
R867	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R871	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R900*	302-471	470 Ohm 1W 10% Comp	01121	RC32GF471K
R901	315-046	1.96K Ohm 1/8W 1% Met Film	91637	RN60C1961F
R905*	-	jumper		
R937	304-018	1K Ohm 1/8W LIN VAR	71450	U201
R954	315-001	14.0 Ohm 1/8W 1% Met Film	91637	RN60C14R0F
R955	315-003	28.0 Ohm 1/8W 1% Met Film	91637	RN60C28R0F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-006	140 Ohm 1/8W 1% Met Film	91637	RN60C1400F
R958	315-008	280 Ohm 1/8W 1% Met Film	91637	RN60C2800F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-011	1.40K Ohm 1/8W 1% Met Film	91637	RN60C1401F
R961	315-013	2.80K Ohm 1/8W 1% Met Film	91637	RN60C2801F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F
Z827	500-005	DIODE	14099	SCE2
Z845*,Z846*	-	omit		

* Applicable to D & DL units only.

OSCILLATOR UNIT - PARTS LIST FOR MODEL H812, L, D, DL

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-014	Scale	18786	
AT901	-	omit		
C820*	420-040	0.0047uF 1kV 20% Cer	56289	5GA-D47
FL901	574-006	FILTER (L, DL only)	12598	F30-12.4G Hz
Q811*	502-013	TRANSISTOR	01295	2N3703
Q812*	502-005	TRANSISTOR	01295	2N697
Q819*	502-010	TRANSISTOR	01295	2N3707
R817	315-027	3.16K Ohm 1/8W 1% Met Film	91637	RN60C3161K
R818	315-019	100K Ohm 1/8W 1% Met Film	91637	RN60C1003K
R822	305-062	300 Ohm 3W 1% WW	91637	RW79U3000F
R824-R832	315-052	40.2 Ohm 1/8W 1% Met Film	91637	RN60C40R2F
R833	315-065	15.8K Ohm 1/8W 1% Met Film	91637	RN60C1582F
R834	315-020	49.9K Ohm 1/8W 1% Met Film	91637	RN60C4992F
R835	315-074	75.0K Ohm 1/8W 1% Met Film	91637	RN60C7502F
R836	315-075	56.2K Ohm 1/8W 1% Met Film	91637	RN60C5622F
R837	315-019	100K Ohm 1/8W 1% Met Film	91637	RN60C1003F
R838	315-074	75.0K Ohm 1/8W 1% Met Film	91637	RN60C7502F
R839	315-037	69.8K Ohm 1/8W 1% Met Film	91637	RN60C6982F
R840	315-044	154K Ohm 1/8W 1% Met Film	91637	RN60C1543F
R841	315-051	147K Ohm 1/8W 1% Met Film	91637	RN60C1473F
R842	315-037	69.8K Ohm 1/8W 1% Met Film	91637	RN60C6982F
R845	300-333	33K Ohm 1/4W 10% Comp	01121	RC07GF333K
R846	315-035	15.4K Ohm 1/8W 1% Met Film	91637	RN60C1542F
R847	315-080	30.1K Ohm 1/8W 1% Met Film	91637	RN60C3012F
R849,R850	304-022	2K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-022	24.9K Ohm 1/8W 1% Met Film	91637	RN60C2492F
R860	315-031	20.5K Ohm 1/8W 1% Met Film	91637	RN60C2052F
R867	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R871	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R900*	302-471	470 Ohm 1W 10% Comp	01121	RC32GF471K
R901	315-046	1.96K Ohm 1/8W 1% Met Film	91637	RN60C1961F
R905*	-	jumper		
R937	304-018	1K Ohm 1/8W LIN VAR	71450	U201
R954	315-002	17.4 Ohm 1/8W 1% Met Film	91637	RN60C17R4F
R955	315-004	34.8 Ohm 1/8W 1% Met Film	91637	RN60C34R8F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-007	174 Ohm 1/8W 1% Met Film	91637	RN60C1740F
R958	315-009	348 Ohm 1/8W 1% Met Film	91637	RN60C3480F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-012	1.74K Ohm 1/8W 1% Met Film	91637	RN60C1741F
R961	315-014	3.48K Ohm 1/8W 1% Met Film	91637	RN60C3481F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F
Z827	500-005	DIODE	14099	SCE2
Z845*,Z846*	-	omit		

* Applicable to D & DL units only.

OSCILLATOR UNIT - PARTS LIST FOR MODEL H1015

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-025	Scale	18786	
AT901	-	omit		
C820	-	omit		
FL901	-	omit		
Q811	-	omit		
Q812	-	omit		
Q819	-	omit		
R817	315-027	3.16K Ohm 1/8W 1% Met Film	91637	RN60C3161F
R818	315-029	60.4K Ohm 1/8W 1% Met Film	91637	RN60C6042F
R822	305-065	232 Ohm 3W 1% WW	91637	RW79U2320F
R824-R832	315-052	40.2 Ohm 1/8W 1% Met Film	91637	RN60C40R2F
R833	315-058	9.09K Ohm 1/8W 1% Met Film	91637	RN60C9091F
R834	300-334	330K Ohm 1/4W 10% Comp	01121	RC07GF334K
R835	315-023	40.2K Ohm 1/8W 1% Met Film	91637	RN60C4022F
R836	315-029	60.4K Ohm 1/8W 1% Met Film	91637	RN60C6042F
R837	315-033	46.4K Ohm 1/8W 1% Met Film	91637	RN60C4642F
R838	315-023	40.2K Ohm 1/8W 1% Met Film	91637	RN60C4022F
R839	315-037	69.8K Ohm 1/8W 1% Met Film	91637	RN60C6982F
R840	315-029	60.4K Ohm 1/8W 1% Met Film	91637	RN60C6042F
R841	315-025	165K Ohm 1/8W 1% Met Film	91637	RN60C1653F
R842	-	omit		
R845	300-333	33K Ohm 1/4W 10% Comp	01121	RC07GF333K
R846	315-061	10.0K Ohm 1/8W 1% Met Film	91637	RN60C1002F
R847	315-085	21.0K Ohm 1/8W 1% Met Film	91637	RN60C2102F
R849,R850	304-022	2K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-092	14.0K Ohm 1/8W 1% Met Film	91637	RN60C1402F
R860	315-062	11.8K Ohm 1/8W 1% Met Film	91637	RN60C1182F
R867	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R871	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R901	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R937	-	omit		
R954	315-001	14.0 Ohm 1/8W 1% Met Film	91637	RN60C14R0F
R955	315-003	28.0 Ohm 1/8W 1% Met Film	91637	RN60C28R0F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-006	140 Ohm 1/8W 1% Met Film	91637	RN60C1400F
R958	315-008	280 Ohm 1/8W 1% Met Film	91637	RN60C2800F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-011	1.40K Ohm 1/8W 1% Met Film	91637	RN60C1401F
R961	315-013	2.80K Ohm 1/8W 1% Met Film	91637	RN60C2801F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F
Z827	500-005	DIODE	14099	SCE2

OSCILLATOR UNIT - PARTS LIST FOR MODEL H1218

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-015	Scale	18786	
AT901	-	omit		
C820	-	omit		
CR827	500-005	DIODE	14099	SCE2
FL901	-	omit		
Q811,Q812	-	omit		
Q819	-	omit		
R817	315-027	3.16K Ohm 1/8W 1% Met Film	91637	RN60C3161F
R818	315-074	75K Ohm 1/8W 1% Met Film	91637	RN60C7502F
R822	305-049	244 Ohm 3W 1% WW	91637	RW79U2440F
R824-R832	315-052	40.2 Ohm 1/8W 1% Met Film	91637	RN60C40R2F
R833	315-021	33.2K Ohm 1/8W 1% Met Film	91637	RN60C3322F
R834	315-023	40.2K Ohm 1/8W 1% Met Film	91637	RN60C4022F
R835	315-034	27.4K Ohm 1/8W 1% Met Film	91637	RN60C2742F
R836	-	omit		
R837	315-021	33.2K Ohm 1/8W 1% Met Film	91637	RN60C3322F
R838	315-029	60.4K Ohm 1/8W 1% Met Film	91637	RN60C6042F
R839	315-020	49.9K Ohm 1/8W 1% Met Film	91637	RN60C4992F
R840	-	omit		
R841	315-019	100K Ohm 1/8W 1% Met Film	91637	RN60C1003F
R842	-	omit		
R845	300-333	33K Ohm 1/4W 10% Comp	01121	RC07GF333K
R846	315-016	10.5K Ohm 1/8W 1% Met Film	91637	RN60C1052F
R847	315-022	24.9K Ohm 1/8W 1% Met Film	91637	RN60C2492F
R849,R850	304-022	2K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-065	15.8K Ohm 1/8W 1% Met Film	91637	RN60C1582F
R860	315-073	13.3K Ohm 1/8W 1% Met Film	91637	RN60C1332F
R867	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R871	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R901	399-152	1.5K Ohm 1/4W 10% Comp	01121	RC07GF152K
R937	-	omit		
R954	315-001	14.0 Ohm 1/8W 1% Met Film	91637	RN60C14R0F
R955	315-003	28.0 Ohm 1/8W 1% Met Film	91637	RN60C28R0F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-006	140 Ohm 1/8W 1% Met Film	91637	RN60C1400F
R958	315-008	280 Ohm 1/8W 1% Met Film	91637	RN60C2800F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-011	1.40K Ohm 1/8W 1% Met Film	91637	RN60C1401F
R961	315-013	2.80K Ohm 1/8W 1% Met Film	91637	RN60C2801F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F
	577-008	Waveguide, flexible	18786	

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-016	Scale	18786	
AT901	-	omit		
C820	-	omit		
FL901	-	omit		
Q811,Q812	-	omit		
Q819	-	omit		
R817	315-027	3.16K Ohm 1/8W 1% Met Film	91637	RN60C3161F
R818	315-019	100K Ohm 1/8W 1% Met Film	91637	RN60C1003F
R822	305-061	348 Ohm 3W 1% W W	91637	RW79U3480F
R824-R832	315-052	40.2 Ohm 1/8W 1% Met Film	91637	RN60C40R2F
R833	-	omit		
R834	315-050	121K Ohm 1/8W 1% Met Film	91637	RN60C1213F
R835	315-021	33.2K Ohm 1/8W 1% Met Film	91637	RN60C3322F
R836	315-042	86.6K Ohm 1/8W 1% Met Film	91637	RN60C8662F
R837	315-031	20.5K Ohm 1/8W 1% Met Film	91637	RN60C2052F
R838	315-033	46.4K Ohm 1/8W 1% Met Film	91637	RN60C4642F
R839	315-037	69.8K Ohm 1/8W 1% Met Film	91637	RN60C6982F
R840	315-042	86.6K Ohm 1/8W 1% Met Film	91637	RN60C8662F
R841	315-021	33.2K Ohm 1/8W 1% Met Film	91637	RN60C3322F
R842	315-023	40.2K Ohm 1/8W 1% Met Film	91637	RN60C4022F
R845	300-333	33K Ohm 1/4W 10% Comp	01121	RC07GF333K
R846	315-077	12.7K Ohm 1/8W 1% Met Film	91637	RN60C1272F
R847	315-022	24.9K Ohm 1/8W 1% Met Film	91637	RN60C2492F
R849,R850	304-022	2K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-032	19.1K Ohm 1/8W 1% Met Film	91637	RN60C1912F
R860	315-065	15.8K Ohm 1/8W 1% Met Film	91637	RN60C1582F
R867	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R871	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R901	300-152	1.5K Ohm 1/4W 10% Comp	01121	RC07GF152K
R937	-	omit		
R954	315-002	17.4 Ohm 1/8W 1% Met Film	91637	RN60C17R4F
R955	315-004	34.8 Ohm 1/8W 1% Met Film	91637	RN60C34R8F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-007	174 Ohm 1/8W 1% Met Film	91637	RN60C1740F
R958	315-009	348 Ohm 1/8W 1% Met Film	91637	RN60C3480F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-012	1.74K Ohm 1/8W 1% Met Film	91637	RN60C1741F
R961	315-014	3.48K Ohm 1/8W 1% Met Film	91637	RN60C3481F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F
	577-002	Waveguide, flexible	18786	
Z827	500-005	DIODE	14099	

Reference Designation	Micro-Power Part Number	Description	Code Ident	Mfg No
-	209-017	Scale	18786	
AT901	-	omit		
C820	-	omit		
FL901	-	omit		
Q811,Q812	-	omit		
Q819	-	omit		
R817	315-027	3.16K Ohm 1/8W 1% Met Film	91637	RN60C3161F
R818	315-019	100K Ohm 1/8W 1% Met Film	91637	RN60C1003F
R822	305-058	332 Ohm 3W 1% WW	91637	RW79U3320F
R824-R832	315-052	40.2 Ohm 1/8W 1% Met Film	91637	RN60C40R2F
R833	315-031	20.5K Ohm 1/8W 1% Met Film	91637	RN60C2052F
R834	315-031	20.5K Ohm 1/8W 1% Met Film	91637	RN60C2052F
R835	315-037	69.8K Ohm 1/8W 1% Met Film	91637	RN60C6982F
R836	315-021	33.2K Ohm 1/8W 1% Met Film	91637	RN60C3322F
R837	315-029	60.4K Ohm 1/8W 1% Met Film	91637	RN60C6042F
R838	315-033	46.4K Ohm 1/8W 1% Met Film	91637	RN60C4642F
R839	315-017	66.5K Ohm 1/8W 1% Met Film	91637	RN60C6652F
R840	315-050	121K Ohm 1/8W 1% Met Film	91637	RN60C1213F
R841	315-023	40.2K Ohm 1/8W 1% Met Film	91637	RN60C4022F
R842	315-020	49.9K Ohm 1/8W 1% Met Film	91637	RN60C4992F
R845	-	jumper		
R846	315-073	13.3K Ohm 1/8W 1% Met Film	91637	RN60C1332F
R847	315-022	24.9K Ohm 1/8W 1% Met Film	91637	RN60C2492F
R849,R850	304-022	2K Ohm 1/2W LIN Multiturn	91637	2387
R859	315-071	21.5K Ohm 1/8W 1% Met Film	91637	RN60C2152F
R860	315-069	18.7K Ohm 1/8W 1% Met Film	91637	RN60C1872F
R867	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R871	300-682	6.8K Ohm 1/4W 10% Comp	01121	RC07GF682K
R880	300-103	10K Ohm 1/4W 10% Comp	01121	RC07GF103K
R896	300-222	2.2K Ohm 1/4W 10% Comp	01121	RC07GF222K
R901	300-152	1.5K Ohm 1/4W 10% Comp	01121	RC07GF152K
R937	-	omit		
R954	315-002	17.4 Ohm 1/8W 1% Met Film	91637	RN60C17R4F
R955	315-004	34.8 Ohm 1/8W 1% Met Film	91637	RN60C34R8F
R956	315-005	69.8 Ohm 1/8W 1% Met Film	91637	RN60C69R8F
R957	315-007	174 Ohm 1/8W 1% Met Film	91637	RN60C1740F
R958	315-009	348 Ohm 1/8W 1% Met Film	91637	RN60C3480F
R959	315-010	698 Ohm 1/8W 1% Met Film	91637	RN60C6980F
R960	315-012	1.74K Ohm 1/8W 1% Met Film	91637	RN60C1741F
R961	315-014	3.48K Ohm 1/8W 1% Met Film	91637	RN60C3481F
R962	315-015	6.98K Ohm 1/8W 1% Met Film	91637	RN60C6981F
	577-010	Waveguide, flexible	18786	
Z827	500-005	DIODE	14099	SCE2

NOTICE

Carefully inspect equipment immediately upon receipt. Do not discard any packing material until you are satisfied unit is working properly and no damage is evident. If shipping damages are found, however, report all claims to carrier immediately.

X. WARRANTY

All Micro-Power, Inc. products are warranted to the original purchaser against defective material and workmanship for a period of one year after date of initial shipment. Our liability is limited to repairing or replacing any defective part with the exception of vacuum tubes, panel lamps and fuses, provided:

1. Micro-Power, Inc. is notified in writing upon discovery of such defects, noting the model, serial number and a brief statement of the fault, and

2. The defective product is returned to us, transportation charges prepaid by Purchaser.

3. The examination of such product by Micro-Power, Inc. shall disclose to its satisfaction that such defects exist and have been caused by improper installation or application, neglect, repair, alteration, misuse or accident.

Under no circumstances shall Micro-Power, Inc. be liable for collateral or consequential damages of any nature.

This warranty is in lieu of all other warranties, expressed or implied.

WARRANTY

BACKWARD-WAVE OSCILLATOR
and
TRANSISTOR OSCILLATOR

The backward-wave oscillator or transistor oscillator installed in the instrument is unconditionally warranted to be free from manufacturing defects for a period of 12 months from date of shipment from Micro-Power. Should the tube or device fail during the warranty period as a result of a manufacturing defect, it may be returned to the Micro-Power factory for repair or replacement at no cost. Oscillators received damaged or with evidence of tampering do not qualify. If an oscillator which has failed during the warranty period is replaced with another one, the replacement unit will be warranted for the balance of the original 12-month period.

Oscillator Return Procedure

No allowance will be made for returned oscillators which are broken on arrival at the factory. Oscillators must be packed and shipped according to the instructions below, and the service information form must be properly completed and included in the carton.

1. Carefully wrap in a 1/4 inch thick "kimpack" cotton batting, or other soft padding material.

2. Wrap the above in heavy kraft paper.

3. Pack in a rigid container which provides a 4 inch minimum distance all around the unit.

4. Surround the unit with at least 4 inches of pack excelsior or similar shock absorbing material. Be certain that the packing is tight all around.

5. Mark the container FRAGILE and ship PREPAID via Air Freight or Railway Express. Do not ship via Parcel Post or Air Parcel Post.

7/69

SERVICE INFORMATION
REQUIRED FOR TUBE RETURN

IMPORTANT: PLEASE ANSWER ALL QUESTIONS FULLY — INSUFFICIENT INFORMATION WILL DELAY PROCESSING OF YOUR CLAIM. NOTE TUBE RETURN PROCEDURE ON REVERSE SIDE.

FROM: (TUBE OWNER)

COMPANY_____

ADDRESS_____

_____

_____

TUBE TYPE_____

TUBE SERIAL NO._____

TUBE PURCHASED FROM_____

TUBE IS ORIGINAL ( ) OR REPLACEMENT ( )

FOR FURTHER INFORMATION CONTACT:

NAME_____

TITLE_____

COMPANY_____

ADDRESS_____

_____

EQUIPMENT MANUFACTURER_____

EQUIPMENT MODEL_____

EQUIPMENT PURCHASE DATE_____

DATE TUBE RECEIVED_____

DATE FIRST TESTED_____

DATE PLACED IN SERVICE_____

DATE OF FAILURE_____

HOURS USE PER DAY (AVERAGE)_____

NUMBER OF DAYS IN SERVICE_____

TOTAL HOURS FILAMENT OPERATION_____

1. CONDITIONS AT TIME OF FAILURE:

A. HEATER VOLTAGE_____V.
HEATER CURRENT_____A.

B. ANODE VOLTAGE_____V.
ANODE CURRENT_____MA.

C. HELIX VOLTAGE, VOLTS
LO END _____. HI END_____.

D. HELIX CURRENT, MA
LO END _____. HI END_____.

E. COLLECTOR CURRENT, MA.
LO END _____. HI END_____

F. COLLECTOR VOLTAGE WITH RESPECT TO HELIX_____VOLTS.

2. SYMPTOMS: (DESCRIPTION OF TUBE'S DEFECT, IF KNOWN AND/OR UNUSUAL CONDITIONS)

SIGNATURE_____

TITLE_____

DATE_____

VOLTAGE TUNABLE MAGNETRON

The VOLTAGE TUNABLE MAGNETRON used in this equipment is warranted by MICTRON INC. All warranty claims should be processed directly with MICTRON.

Condition of Warranty

VOLTAGE TUNABLE MAGNETRONS manufactured by MICTRON INC. to which this policy is applicable are warranted to be free from manufacturing defects for a period of one year from date of purchase or one thousand (1000) hours.

If the tube should fail during the warranty period as a result of a defect in manufacture, it must be returned to MICTRON. The manufacturer reserves the right to repair the tube, and return it to the customer. Tubes received broken or with evidence of tampering do not qualify. Unrepairable tubes will be replaced at a cost prorated over the warranty time. The actual amount will be determined on the basis of months remaining in the 12-month proration warranty period, or the hours remaining in the 1000 prorated heater filament operating time, whichever is the lesser credit.

Tube Return Procedure

No allowance will be made for returned tubes which are broken on arrival at the factory. Tubes must be packed and shipped according to the instructions below and the service information form must be properly completed and included in the tube carton.

1. Carefully wrap tube in 1/4 inch thick "kimpack" cotton batting, or other soft padding material, or "skinpack" on cardboard diagonally fitted into container.

2. Wrap the above in heavy kraft paper.

3. Pack in a rigid container which is at least 4 inches larger than the tube in each dimension.

4. Surround the tube with at least 2 inches of packed excelsior or similar shock absorbing material. Be certain that the packing is tight all around the tube.

5. Tubes returned from outside the Continental United States should be packed in a wooden box.

6. Mark container FRAGILE and ship PREPAID via Air Freight or Railway Express. Do not ship PARCEL POST or AIR PARCEL POST.

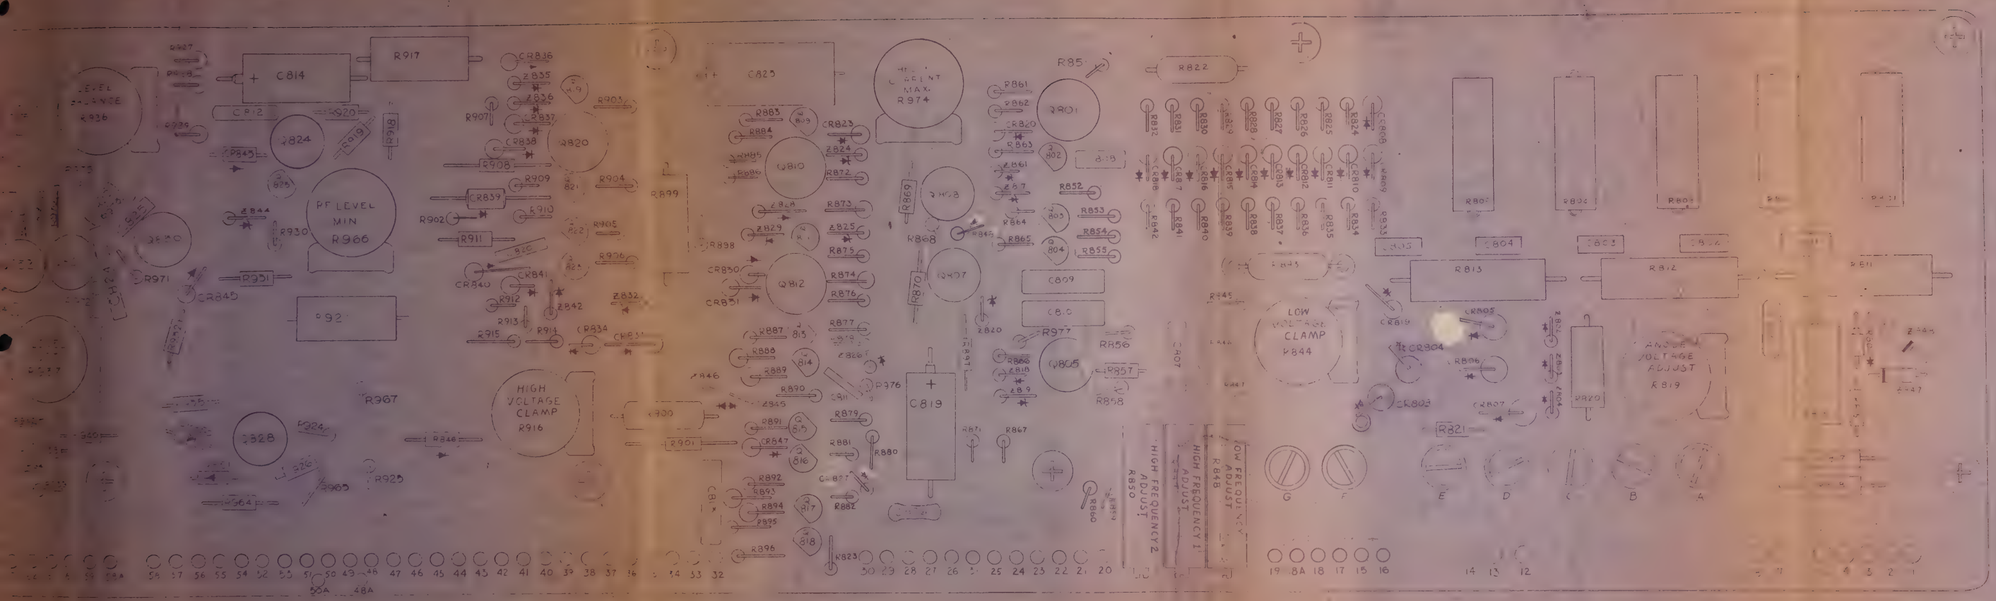
C814
R917
C812
R920
Q824
R919
R918
R907
R903
CR836
Z835
Z836
Z837
Q820
CR838
R908
R909
R904
CR839
R902
R910
R911
R905
R906
CR841
CR840
R912
Z842
Z832
R913
R915
R914
CR834
CR833
R930
R931
R971
CR844
CR845
Q830
Q832
R924
R926
R925
Q828
R964
R967
HIGH VOLTAGE CLAMP R916
R899
R898
C825
Q810
Q812
R883
R884
R885
R886
R887
R889
R890
R891
R892
R893
R894
R895
R896
CR823
Z824
R872
R873
Z825
R875
R874
R876
R877
R878
Z826
R879
R881
R880
CR847
R882
CR846
R900
R901
P376
Z845
CR850
CR851
CURRENT MAX. R974
R869
Q808
R868
Q807
R870
Z820
C819
R871
R867
R861
R862
R863
R864
R865
R866
R801
R852
R853
R854
R855
C809
C810
R977
Q805
R856
R857
R858
R859
R860
R822
R823
R824
R825
R826
R827
R828
R829
R830
R831
R832
R833
R834
R835
R836
R837
R838
R839
R840
R841
R842
R843
R844
C803
C804
C805
C806
R803
R804
R805
R806
R807
R808
R809
R810
R811
R812
R813
R814
R815
R816
R817
R818
R819
R820
R821
CR802
CR803
CR804
CR805
CR806
CR807
CR808
CR809
CR810
CR811
CR812
CR813
CR814
CR815
CR816
CR817
CR818
CR819
CR820
CR821
CR822
Z801
Z802
Z803
Z804
Z805
Z806
Z807
Z808
Z809
Z810
Z811
Z812
Z813
Z814
Z815
Z816
Z817
Z818
Z819
Z820
Z821
Z822
Z823
Z824
Z825
Z826
Z827
Z828
Z829
Z830
Z831
Z832
Z833
Z834
Z835
Z836
Z837
Z838
Z839
Z840

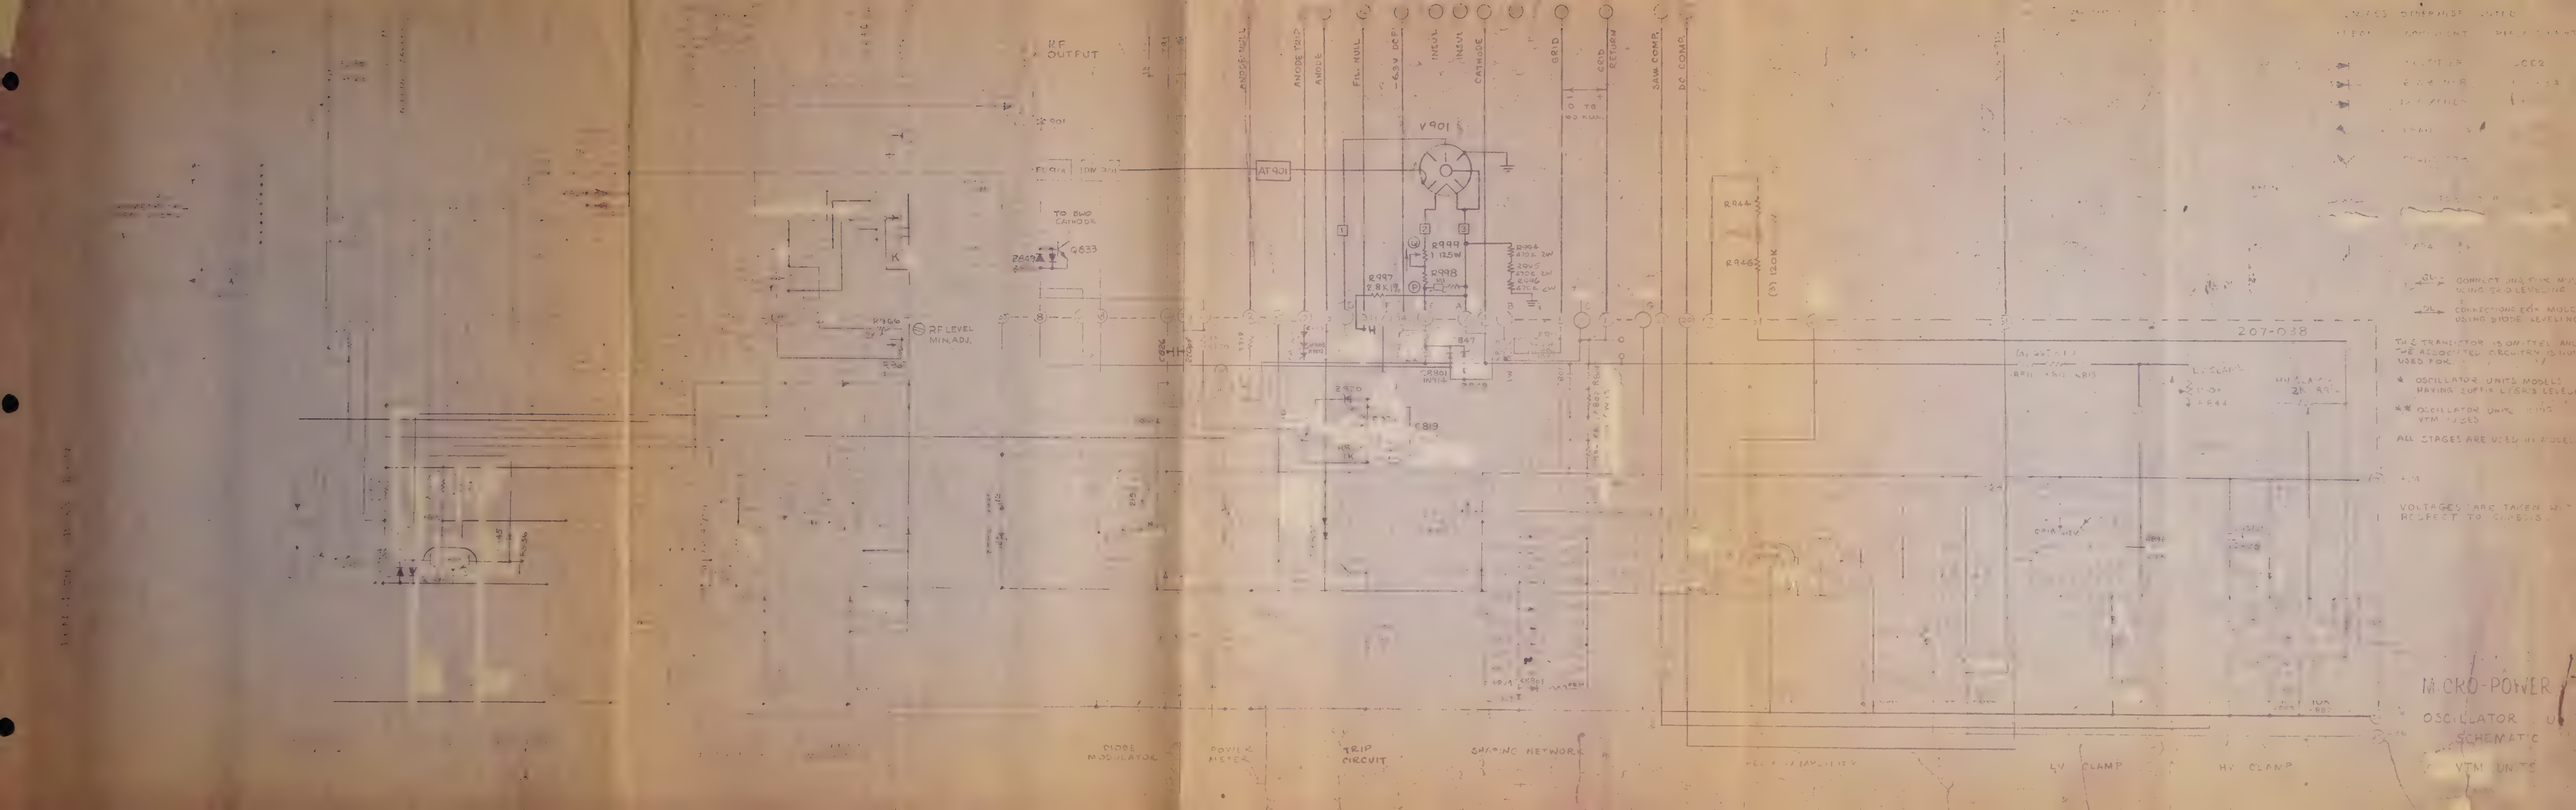
RF OUTPUT
V901
AT901
R999
R998
R997
2.8K 1%
R996
R944
R946
(3) 120K
207-038
TO BWO CATHODE
RF LEVEL MIN. ADJ.
R966
C819
CR901
DIODE MODULATOR
POWER METER
TRIP CIRCUIT
SHAPING NETWORK
LV CLAMP
HV CLAMP
MICRO-POWER
OSCILLATOR
SCHEMATIC

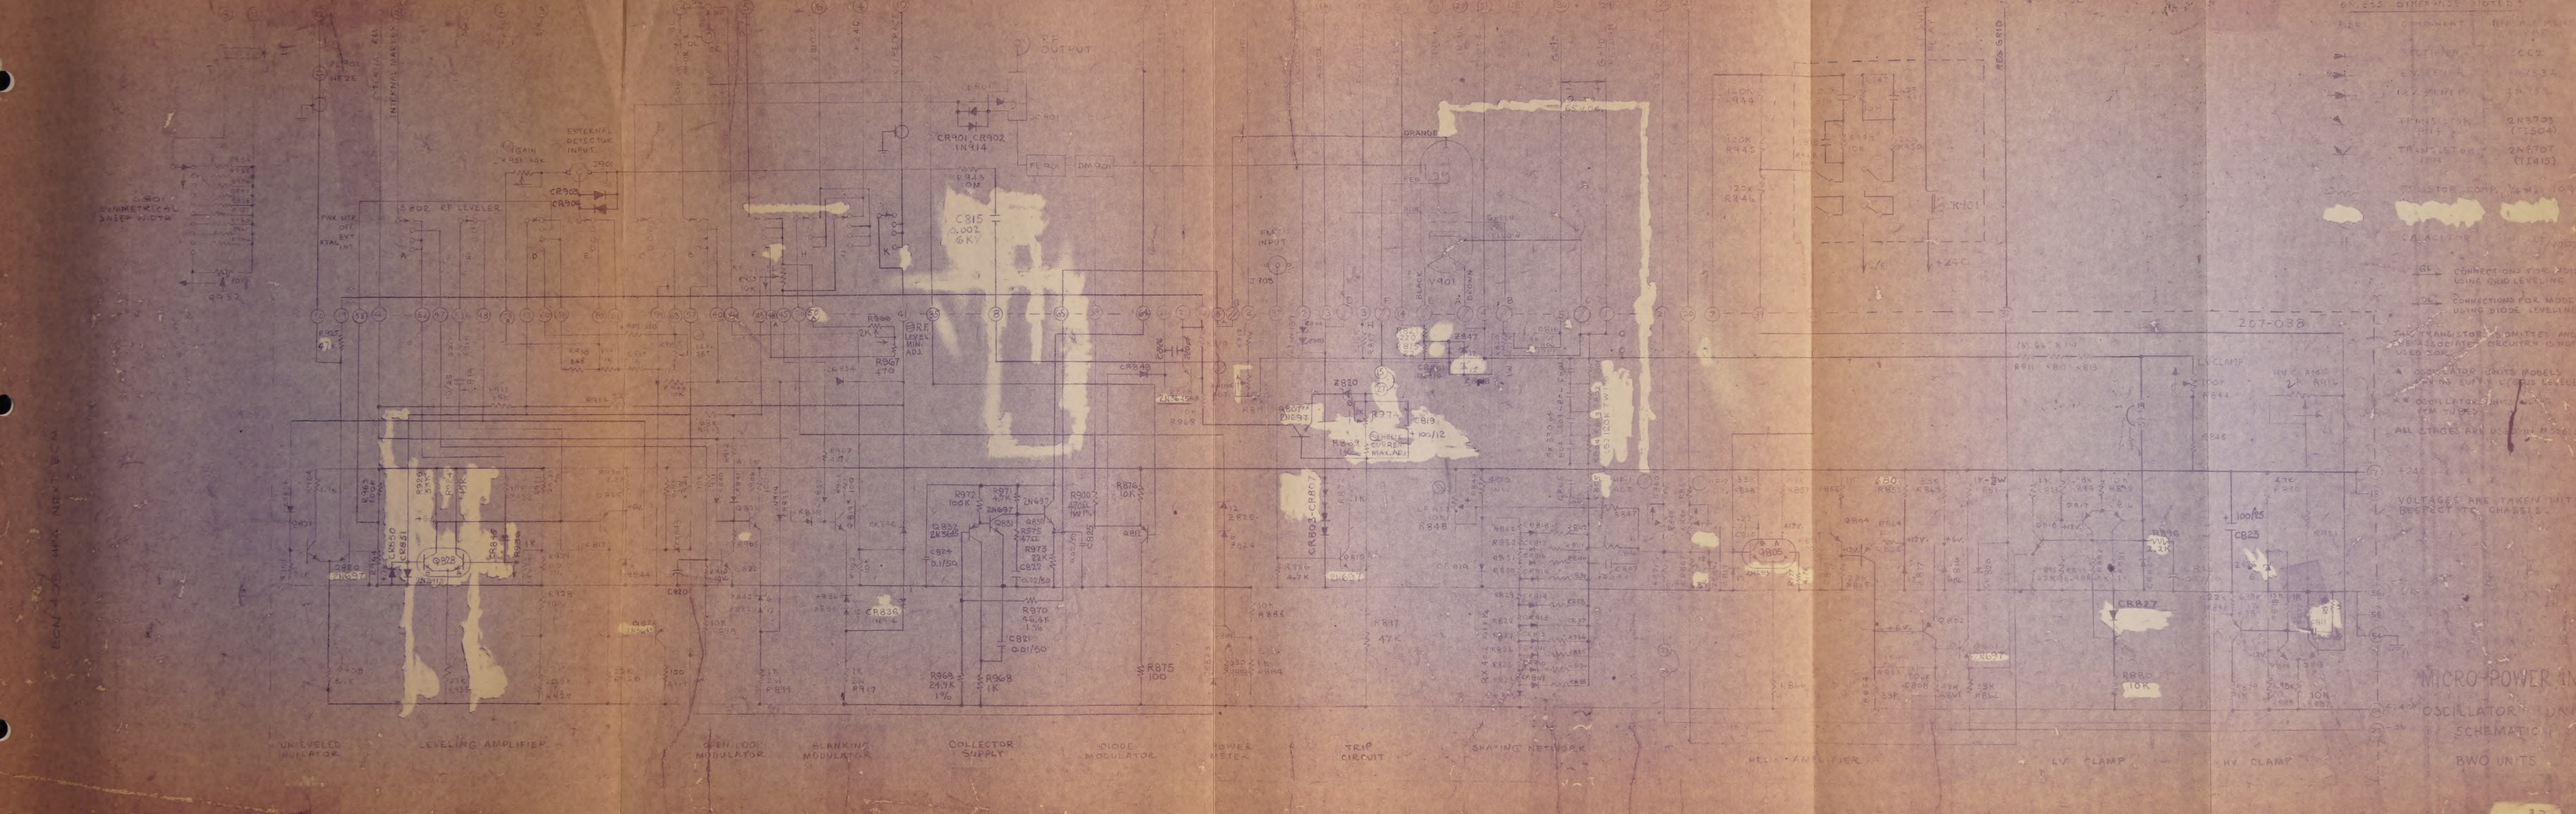
CR901 CR902 1N914
C815 .002 6KV
R967 470
R968 249K 1%
R969 1K
R970 45.4K 1%
C821 .01/50
R875 100
R876 10K
R900 499K 1%
R972 100K
R973 22K
C822 .1/50
C824 .1/50
R977 47K
C819 100/12
R836 4.2K
C823 100/25
R827 10K
R848
R844
R845
R846
R847
R849
R850
R851
R852
R853
R854
R855
R856
R857
R858
R859
R860
R861
R862
R863
R864
R865
R866
R867
R868
R869
R870
R871
R872
R873
R874
R875
R876
R877
R878
R879
R880
R881
R882
R883
R884
R885
R886
R887
R888

MP MASTER
MA35906
83399